



PACIFIC

AURORAS LED

PLI Linear Direct & Indirect
Diffused Series




Description

Recessed indirect low glare LED troffer.

Application

Offices, commercial, education, retail and commercial.

Photometric

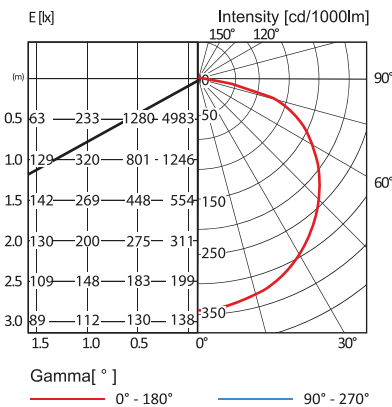

IES file No: SJ3848

Options

- Dimming
- 3000K / 6500K
- Cyanosis
- Surface Mount

Electrical

Control Gear	Tridonic
Light Source	Linear LED Strip
Wattage	39W
Lumen Output	3550lm
CRI	80
LER	91
CCT	4000K
SDCM	<4
L70	50,000hrs

Mechanical

Construction	Made of cold rolled steel
Diffuser	Linear Prismatic
Secondary Diffuser	Frosted U Shape

Dimension



Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (Watt)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PLI B5 (2x2)	595x595x85	Tridonic	24	>1850	77
PLI B5 (2x2)	595x595x85	Tridonic	39	>3550	91
PLI D5 (1x4)	1195x295x85	Tridonic	44	>3750	85
PLI D5 (1x4)	1195x295x85	Tridonic	78	>7100	91
PLI D5 (2x4)	1195x595x85	Tridonic	44	>3750	85
PLI D5 (2x4)	1195x595x85	Tridonic	78	>7100	91

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.

For the latest product information please visit <http://www.sirijaya.com>