





SAC 128/S ASY

Designed for surface mounting with asymmetrical mirror. End to end continuously mounting with connection of a bracket to form a straight line position. Suitable for use in modern interiors such as hotels, schools, government buildings, shopping complexes, offices, hospitals, condominiums and etc.



**TM5 Utilization Factors**

Utilization factors			LOR =55.5% DLOR =55.5% ULOR =0.0%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	N.A.	39	43	46	50	52	54	56	58
	0.3		N.A.	35	39	42	47	49	52	54	56
0.5	0.1	0.2	N.A.	32	36	39	44	47	49	52	55
	0.5		N.A.	38	42	44	48	50	52	54	56
0.3	0.3	0.2	N.A.	34	38	41	45	48	50	53	54
	0.1		N.A.	32	36	39	43	46	48	51	53
0.0	0.5	0.2	N.A.	37	40	43	46	49	49	52	53
	0.3		N.A.	34	38	40	44	47	47	51	52
0.0	0.1	0.0	N.A.	31	35	38	42	45	45	50	51
	0.0		N.A.	30	34	37	40	43	45	47	49
			SHR NOM =1.75			SHR MAX =1.82			SHR MAX		
			TR =2.25								

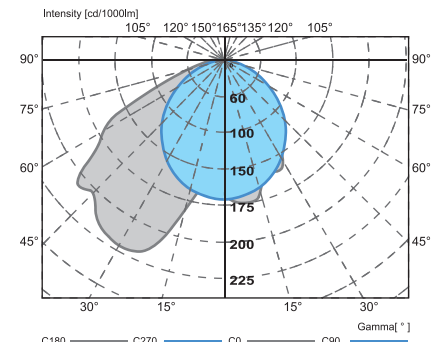

**Technical Data**

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

<b>Body</b>	Made of heavy gauge sheet steel.
<b>Reflector</b>	High quality anodised aluminium.
<b>Paintwork</b>	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
<b>Light Source</b>	Fluorescent T5 lamp of 28W.
<b>Electrical Data</b>	240V, 50Hz, Power factor 0.95.
<b>Wire</b>	HR 105° C.
<b>Ballast</b>	Electronic Ballast.
<b>Lampholder</b>	Moulded from Polycarbonate Material.
<b>Optional components</b>	High frequency electronic ballast/Fused terminal block/Emergency packs
	Radio interference suppressors.

**Dimensions**

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SAC 128/S ASY	1X28W	1195	-	190	-	80	-
SAC 228/S ASY	2X28W	1195	-	190	-	80	-



Note : Subject to +/- 1.5mm

\*SJ Lite reserves the right to change and amend the specification without prior notice.



Your partner in lighting technology