



PACIFIC

AURORAS LED

PLP Linear Diffused Series




Description

Low profile (70mm) surface mount fixture with wrap around diffuser.

Application

general offices, retail, education and commercial.

Photometric

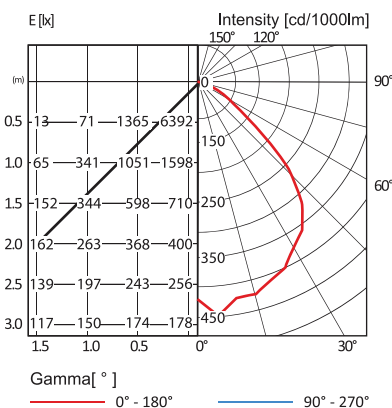

IES file No: SJ4976

Options

- Dimming
- 3000K/6500K
- Emergency

Electrical

| | |
|---------------------|------------------|
| Control Gear | Philips |
| Light Source | Linear LED Strip |
| Wattage | 40W |
| Lumen Output | >3800lm |
| CRI | 80 |
| LER | 95 |
| CCT | 4000K |
| SDCM | <4 |
| L70 | 50,000hrs |

Mechanical

| | |
|---------------------|---------------------------|
| Construction | Made of cold rolled steel |
| Diffuser | Atlanta Diffuser |

Dimension



Ordering Data

| MODEL NO. | Dimension (LxWxH)(mm) | Light Source Model | Nominal System Power (Watt) | Nominal System Lumen Output (lm) | Nominal System Efficacy (lm/W) |
|--------------|-----------------------|--------------------|-----------------------------|----------------------------------|--------------------------------|
| PLP A3 (1x2) | 618x305x70 | Philips | 19 | >2250 | 118 |
| PLP B4 (1x2) | 618x305x70 | Philips | 40 | >3800 | 95 |
| PLP C4 (1x2) | 618x305x70 | Philips | 59 | >5550 | 94 |
| PLP B4 (1x4) | 1204x305x70 | Philips | 40 | >3800 | 95 |
| PLP D4 (1x4) | 1204x305x70 | Philips | 80 | >7550 | 94 |
| PLP F4 (1x4) | 1204x305x70 | Philips | 120 | >11350 | 95 |

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.

For the latest product information please visit <http://www.sirijaya.com>