



LED Glass Tube (HO)

High Output and Energy Efficiency

Applications





Features

- Up to 50% energy saving compared with fluorescents
- Excellent light transmittance and uniform light distribution
- High quality GLASS tube with eco-friendly coating
- Long lifetime up to 50,000 hrs
- Easy installation
- No mercury material or UV radiation
- THD < 20

Benefits

- Considerably lower energy cost
- Lowering maintenance cost
- Easy and flexible installation
- Environmental friendly

Dimensions



- ① Lamp to be used in dry conditions or in a luminaire that provides protection.
- ② Lamp suitable for 50 Hz or 60 Hz operation.
- ③ Lamp not suitable for emergency operation.
- ④ Dimming not allowed.
- ⑤ LED replacement starter.

Order Information

Model No.	Colour Temp. (CCT)	Type	Lampholder	Input Voltage	B. Angle (°)	Power Factor (PF)	Power (W)	Lumen (lm)	Efficiency (lm/W)	Size (ØxL) (mm)
RLASELE122523	3000K	Core Level 3	G13	220-240V 50/60Hz	160	>0.90	8.5	1000	117	28 x 589
RLASELE122524	4000K							1050	124	
RLASELE122526	6500K						18	2100	117	28 x 1199
RLASELE142123	3000K									
RLASELE142124	4000K									
RLASELE142126	6500K									


Note : Subject to +/- 1.5mm

* Specification subject to change without prior notice.




Wiring Diagram


a) Complete New Fixture



b) Used More Than 5 Years Fixture

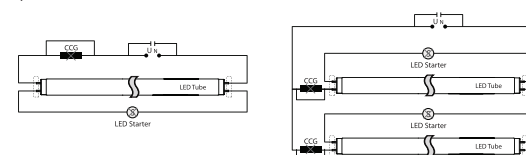

c) Replacing CCG



Retrofit Lamp Installation instructions:



LED Glass Tube Lamp Installation instructions :

- (1) Switch off the power supply,
- (2) Turning the conventional lamp 90°.
- (3) Remove the conventional lamp.
- (4) Remove the conventional starter from the starter holder.
- (5) Insert the LED starter into the starter holder.
- (6) Insert the LED glass lamp into the lamp holder.
- (7) Secure it in position by turning the lamp 90°.
- (8) Switch on the power supply.(220-240V ~ 50/60Hz)

Installation instructions:

- (1) Switch off electricity.
- (2) and (3) remove the conventional lamp and capacitor.
- (4) and (5) Retrofit refer to wiring method diagram b:
 - a) Bypass CCG & Replace the old starter with the LED tube starter.
- (6) Insert the LED lamp into the lamp holder.
- (7) Secure it in position by turning the lamp 90°.
- (8) Switch on electricity.