




Description

Plaster recessed LED linear troffer.

Application

Plaster or gyrock ceiling, offices, schools, retail and commercial.

Photometric

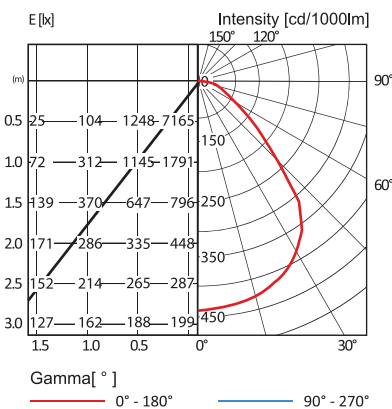

IES file No: SJ5168

Options

- Dimming
- 3000K / 6500K
- Cyanosis
- Emergency


Electrical

Control Gear	Tridonic
Light Source	Linear LED Strip
Wattage	39W
Lumen Output	>4050lm
CRI	80
LER	104
CCT	4000K
SDCM	<4
L70	50,000hrs

Mechanical

Construction	Made of cold rolled steel
Diffuser	AA12 Acrylic

Dimension



PPRT B5 (1x2): W=300mm L=617mm
PPRT B5 (1x4): W=300mm L=1227mm

Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (Watt)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PPRT B5 (1x2)	642x325x90	Tridonic	24	>2100	88
PPRT B5 (1x2)	642x325x90	Tridonic	39	>4050	104
PPRT B5 (1x4)	1250x325x90	Tridonic	24	>2100	88
PPRT B5 (1x4)	1250x325x90	Tridonic	39	>4050	104
PPRT D5 (1x4)	1250x325x90	Tridonic	44	>4250	97
PPRT D5 (1x4)	1250x325x90	Tridonic	78	>8100	104

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.

For the latest product information please visit <http://www.sirijaya.com>