





SSH 228

Designed for direct mounting to ceiling. Diffuser designed on attached to fitting. Provided even light distribution and glare control. Mainly used for offices, supermarkets and complexes.



**TM5 Utilization Factors**

Utilization factors			LOR =64.8% DLOR =64.8% ULOR =0.0%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	32	44	48	52	57	60	62	65	67
	0.3		32	39	44	47	53	56	59	62	65
	0.1		28	35	40	44	49	53	56	60	63
0.5	0.5	0.2	36	42	47	50	55	58	60	62	64
	0.3		32	38	43	46	51	55	57	60	62
	0.1		28	35	39	43	48	52	55	58	61
0.3	0.5	0.2	35	41	45	48	53	55	57	60	62
	0.3		31	37	42	45	50	53	55	58	60
	0.1		28	34	39	42	47	51	53	57	59
0.0	0.0	0.0	27	33	37	40	45	48	51	54	56
			SHR NOM =1.25			SHR MAX =1.45			SHR MAX		
			TR =1.63								

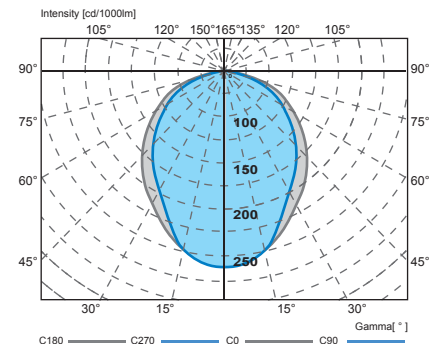

**Technical Data**

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

<b>Body</b>	Made of heavy gauge sheet steel.
<b>Diffuser</b>	Wide choice of diffuser type for selection.
<b>Paintwork</b>	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
<b>Light Source</b>	Fluorescent T5 lamp - 14W, 28W & 54W.
<b>Electrical Data</b>	240V, 50Hz, Power factor 0.9.
<b>Wire</b>	HR 105° C.
<b>Ballast</b>	Electronic Ballast.
<b>Lampholder</b>	Moulded from Polycarbonate Material.
<b>Optional/ Components</b>	Fused terminal block/Conventional ballast/Emergency pack.

**Dimensions**

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SSH 214	2x14W	595	-	595	-	55	-
SSH 314	3x14W	595	-	595	-	55	-
SSH 414	4x14W	595	-	595	-	55	-
SSH 228 (1x4)	2x28W	1195	-	295	-	55	-
SSH 228	2x28W	1195	-	595	-	55	-
SSH 328	3x28W	1195	-	595	-	55	-
SSH 428	4x28W	1195	-	595	-	55	-



Note : Subject to +/- 1.5mm

\*SJ Lite reserves the right to change and amend the specification without prior notice.

