



Designed for recess imperial exposed T-bar ceiling mounting with single parabolic mirror optic louvre with christmas profile cross blades. Louvres reflection by means of slide lock set and can be lowered and hang from either side. Mainly used for general lighting in offices, supermarkets and complexes.



TM5 Utilization Factors

Utilization factors			LOR =83.0% DLOR =83.0% ULOR =0.0%										
Room reflection			Room index										
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5		
0.7	0.5	0.2	N.A.	66	70	74	79	82	84	87	89		
			N.A.	61	66	69	75	79	81	84	87		
			N.A.	57	62	66	72	76	78	82	85		
0.5	0.5	0.2	N.A.	64	68	72	77	79	81	84	85		
			N.A.	60	64	68	73	77	79	82	84		
			N.A.	57	61	65	71	74	77	80	82		
0.3	0.5	0.2	N.A.	63	67	70	74	77	79	81	82		
			N.A.	59	63	67	72	75	76	79	81		
			N.A.	56	60	64	69	73	75	78	79		
0.0	0.0	0.0	N.A.	55	58	62	67	70	71	74	76		
			SHR NOM =2.00			SHR MAX =2.06				SHR MAX			
			TR =2.61										

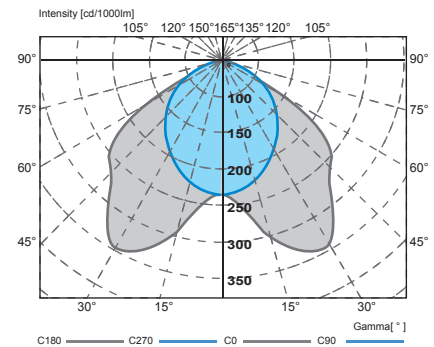

Technical Data

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Body	Made of heavy gauge sheet steel.
Louvre	Perforated sheet or white sheet.
Reflector	Anodised aluminium in either specular, semi specular or matt with profile cross blades.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent T5 lamp of 14W, 28W.
Electrical Data	240V, 50Hz, Power factor 0.95.
Wire	HR 105° C.
Ballast	Electronic Ballast.
Lampholder	Moulded from Polycarbonate Material.
Optional components	Fused terminal block/Emergency packs.

Dimensions

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SRP 128 (1x4)	1X28W	1172	1195	272	295	55	-
SRP 228 (1x4)	2X28W	1172	1195	272	295	55	-



Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.

