





PLUTO 402.6126

Surface mounted downlight for compact fluorescent lamps in both vertical and horizontal mode. High reflectance vacuum metallisation aluminium faceted reflector. With fixed tempered UV filter glass. Suitable for commercial Building, offices, conference rooms, classrooms, shops, etc.



**TM5 Utilization Factors**

Utilization factors			LOR =55.1% DLOR =55.1% ULOR =0.0%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	32	37	41	44	49	51	53	56	57
	0.3		27	33	37	40	45	48	51	54	56
0.5	0.1	0.2	24	30	34	38	42	46	48	52	54
	0.5		31	36	40	43	47	49	51	54	55
0.3	0.3	0.2	27	32	36	40	44	47	49	52	54
	0.1		24	29	34	37	42	45	47	50	52
0.0	0.5	0.0	30	35	39	41	45	48	49	52	53
	0.3		27	32	36	39	43	46	48	50	52
0.0	0.1	0.0	24	29	33	36	41	44	46	49	51
	0.0		23	28	32	35	39	42	44	46	48
			SHR NOM =1.25		SHR MAX =1.41				SHR MAX		
			TR =1.52								

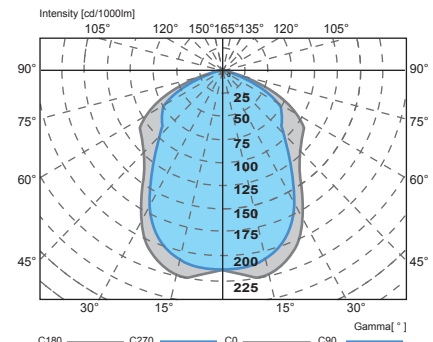

**Technical Data**

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

<b>Body &amp; Ring</b>	Made of cold rolled steel.
<b>Reflector</b>	High quality specular/matt finish aluminium.
<b>Paintwork</b>	Coated with a high gloss white epoxy polyester powder, giving resilient finish.
<b>Light Source</b>	Compact fluorescent lamp of PLC 10W,13W,18W, 26W
<b>Electrical Data</b>	240V, 50Hz Power factor 0.9
<b>Wattage</b>	PLC-10W/13W/18W/26W.
<b>Wire</b>	HR 105° C
<b>Ballast</b>	Polyester vacuum impregnated.
<b>Lampholder</b>	G24d/G24q
<b>Condenser</b>	Metallized polypropylene film.
<b>Optional components</b>	Electronic ballast/Emergency pack.

**Dimensions**

MODEL NO.	RIMØ	Ø	H
PLUTO 402.6110	173	137	200
PLUTO 402.6113	173	137	200
PLUTO 402.6118	173	137	200
PLUTO 402.6126	173	137	200

MODEL NO.	RIMØ	Ø	H



Note : Subject to +/- 1.5mm

\*SJ Lite reserves the right to change and amend the specification without prior notice.

