





Adjustable recessed triple multi luminaires for directional light distribution system PAR lamps. High lamp position and vertically grooved black baffle ensure high lighting comfort level. Ideal for commercial building, offices, conference rooms, department, stores, fashion shops, etc.

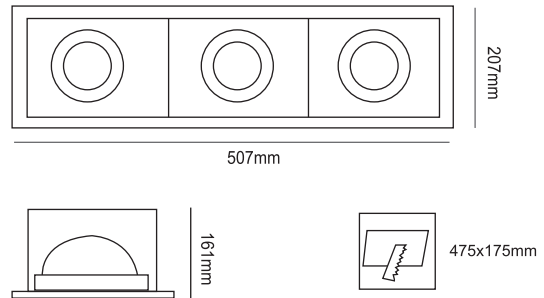

TM5 Utilization Factors

Utilization factors			LOR =53.3% DLOR =53.3% ULOR =0.0%									
Room reflection			Room index									
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5	
0.7	0.5	0.2	41	45	48	50	52	54	55	57	58	
	0.3		38	42	45	47	50	52	54	55	57	
	0.1		36	40	43	45	48	51	52	54	56	
0.5	0.5	0.2	40	44	47	48	51	52	53	55	56	
	0.3		37	41	44	46	49	51	52	54	55	
	0.1		35	40	42	45	47	49	51	53	54	
0.3	0.5	0.2	39	43	45	47	49	51	52	53	54	
	0.3		37	41	44	45	48	48	52	52	53	
	0.1		35	39	42	44	47	48	50	51	52	
0.0	0.5	0.2	34	38	41	42	45	46	48	49	50	
	0.3											
	0.1											
			SHR NOM =0.50 SHR MAX =0.58 SHR MAX TR 0.57									

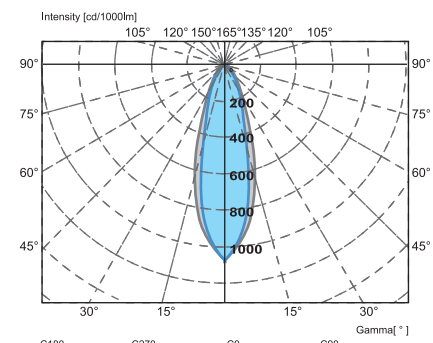

Technical Data

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Body	Made of cold rolled steel.
Ring	Made of die-cast aluminium.
Paintwork	Coated with a high gloss white/black epoxy polyester powder, giving resilient finish.
Light Source	Halogen lamp of AR111, Halogen A Pro 35W/50W/70W/75W/100W
Electrical Data	240V, 50Hz
Wattage	35W/50W/70W/75W/100W.
Wire	Silicone heat resistance cable.
Lampholder	E27
Control Gear Box	Separate.
Optional Light Source	LED PAR30 is compatible and replaceable.

Dimensions

L507(MM) W207(MM) H161(MM)

MODEL NO.	NO. OF LAMP
PLUTO 703.035	3X35W
PLUTO 703.050	3X50W
PLUTO 703.070	3X70W
PLUTO 703.075	3X75W
PLUTO 703.100	3X100W

MODEL NO.	NO. OF LAMP



Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.