





Adjustable recessed downlight for halogen lamp. Suitable for workrooms, shops, museums, galleries, exhibitions, etc.



TM5 Utilization Factors

Utilization factors			LOR =67.4% DLOR =67.4% ULOR =0.0%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	51	57	60	63	66	69	70	72	73
	0.3		48	53	57	60	64	66	68	70	72
0.5	0.1	0.2	45	51	54	57	61	64	66	69	70
	0.5		50	56	59	61	64	66	68	69	70
0.3	0.3	0.2	47	52	56	59	62	64	66	68	69
	0.1		45	50	54	56	60	63	64	67	68
0.0	0.5	0.2	50	54	58	60	63	64	65	67	68
	0.3		47	52	55	58	61	63	64	66	67
0.0	0.1	0.0	44	50	53	56	59	61	63	65	66
	0.0		43	48	52	54	57	59	60	62	63
			SHR NOM =0.50			SHR MAX =0.67			SHR MAX		
			TR =0.67								

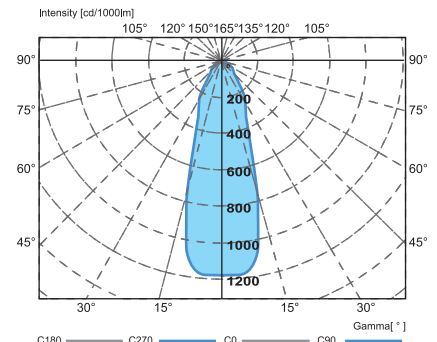

Photometry result or data are available for interior lux calculation upon requisition. Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Technical Data

Body & Ring	Made of compress cold rolled steel.
Paintwork	Coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Halogen bulb 35W/50W.
Electrical Data	240V, 50Hz
Transformer	12V 35W/50W
Lampholder	GU5.3

Dimensions

Ø100 H55(MM)

MODEL NO.	COLOR
PLUTO 810.035	WHITE
PLUTO 810.035	SILVER
PLUTO 810.035	GOLD

MODEL NO.	COLOR
PLUTO 810.050	WHITE
PLUTO 810.050	SILVER
PLUTO 810.050	GOLD



Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.

