





Designed for exposed T-bar ceiling mounting. Diffuser designed attached on T-bar. Provided even light distribution and glare control. Mainly used for offices, supermarkets and complexes.



TM5 Utilization Factors

Utilization factors			LOR =70.7% DLOR =70.7% ULOR =0.0%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	45	51	56	60	64	67	70	72	74
	0.3		40	46	52	55	60	64	66	70	72
	0.1	37	43	48	52	57	61	64	67	70	
0.5	0.5	0.2	44	50	55	58	62	65	67	70	71
	0.3		40	56	51	54	59	62	64	67	69
	0.1	37	42	47	51	56	60	62	65	68	
0.3	0.5	0.2	43	49	53	56	60	63	65	67	68
	0.3		39	45	50	53	57	60	62	65	67
	0.1	36	42	47	50	55	58	61	64	66	
0.0	0.0	0.0	35	40	45	48	53	56	58	61	62
			SHR NOM =1.50			SHR MAX =1.65			SHR MAX		
			TR =1.90								

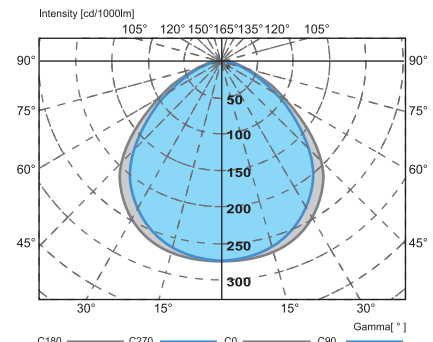

Technical Data

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Body	Made of heavy gauge sheet steel.
Diffuser	AA 12 Acrylic.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent T5 lamp of 14W, 28W.
Electrical Data	240V, 50Hz, Power factor 0.95.
Wire	HR 105° C.
Ballast	Electronic Ballast.
Lamphoder	Moulded from Polycarbonate Material.
Optional/ Components	Fused terminal block/Emergency pack.

Dimensions

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
STU 214 (1x2)	2x14W	612	610	223	288	65	-
STU 228 (1x4)	2x28W	1221	1219	223	288	65	-



Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.

