





SAU 128 (AH)

Designed for recess mounting with double parabolic mirror optic louvre. Exceptional performance with LOR'S in excess of 90%. Mainly used for general lighting in offices, and shops.



TM5 Utilization Factors

Utilization factors			LOR =89.3% DLOR =89.3% ULOR =0.0%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	72	78	83	86	90	92	94	96	98
	0.3		67	74	79	82	87	89	92	94	96
0.5	0.1	0.2	64	70	75	79	84	87	89	92	94
	0.5		70	76	81	84	87	90	91	93	94
0.3	0.3	0.2	66	73	77	80	85	87	89	91	93
	0.1		63	70	75	78	82	85	87	90	92
0.0	0.5	0.2	69	75	79	82	85	87	88	90	91
	0.3		66	72	76	79	83	85	87	89	90
0.0	0.1	0.0	63	69	74	77	81	83	85	87	89
	0.0		62	67	72	75	78	80	82	84	85
			SHR NOM =1.50		SHR MAX =1.65		SHR MAX				
			TR =1.76								

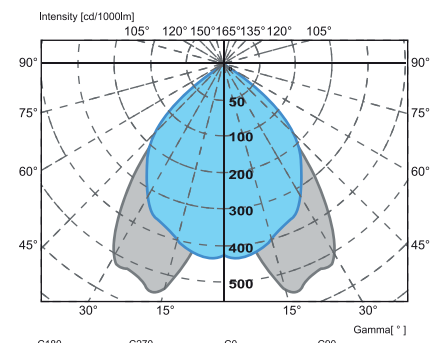

Technical Data

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Body	Made of heavy gauge sheet steel.
Louvre	High quality anodised aluminium.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent T5 lamp of 28W.
Electrical Data	240V, 50Hz, Power factor 0.95.
Wire	HR 105° C.
Ballast	Electronic Ballast.
Lampholder/ Starterholder	Moulded from Polycarbonate Material.

Dimensions

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SAU 114 (AH)	1x14W	569	600	170	302	70	-
SAU 128 (AH)	1x28W	1170	1210	170	302	70	-
SAU 228 (AH)	2x28W	1170	1210	170	600	70	-



Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.

