



Your partner in lighting technology



# ECLIPSE LED

## SEC Linear Trunking Series

### Features & Benefits

Curve shape combines with parabolic louvre for an efficient profile with better glare control and bat wing light distribution. Curvelite can also be supplied in a continuous run configuration.

### Application

Mainly use for general lighting in offices, supermarkets & complexes.

### Luminaire Product Description

Mounting	Pendant
Housing Material	Extruded Aluminum
Power Supply	240V 50Hz
Operating Temperature	45°C
Power Factor	0.95
Total Harmonic Distortion	≤20%
Ingress Protection	IP20
Insulation Classification	Class I
Life Cycle	30,000hrs/50,000hrs


### Optics

Diffuser Material	Polycarbonate
Diffuser Pattern	Frosted U Shape
Louvre Material	High Quality Anodised Aluminium
Louvre Type	Specular


### Control

*Dimming Option	Fixed Output/Dali/1-10V
-----------------	-------------------------

### Photometric

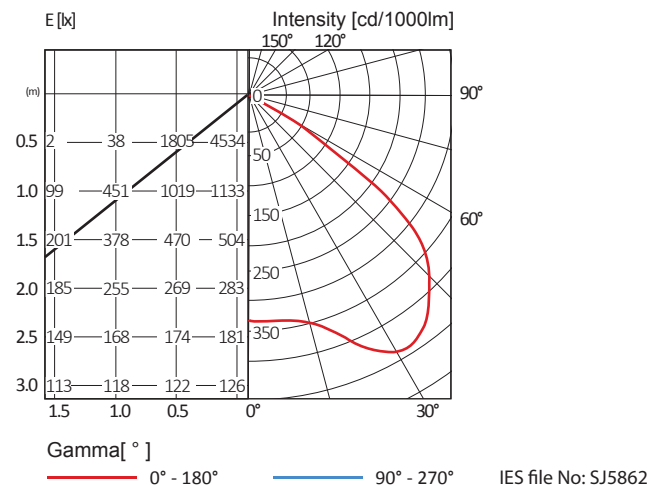


## Dimension



## Order Reference

Model	Number Of Module	Brand Of Component
SEC	A ( 1 module )	4 - Philips
	B ( 2 modules )	
	C ( 3 modules )	5 - Tridonic
	D ( 4 modules )	
	E ( 5 modules )	
	F ( 6 modules )	

### Example :

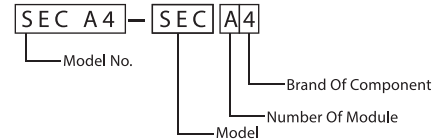

## Order Information

Model No.	Dimension (LxWxH) (mm)	Driver Model	Light Source Model	Module Dimension (WxL) (mm)	Nominal Lumen Per Modules (lm) @25°C	CRI & CCT	Nominal Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
SEC B4	1128x160x70	CertaDrive	CertaFlux	20x560	1550	830/840/865	23	2350	102
SEC B4					2200		34		

Note : Subject to +/- 1.5mm

\*Other various types are available upon request.