




Your partner in lighting technology

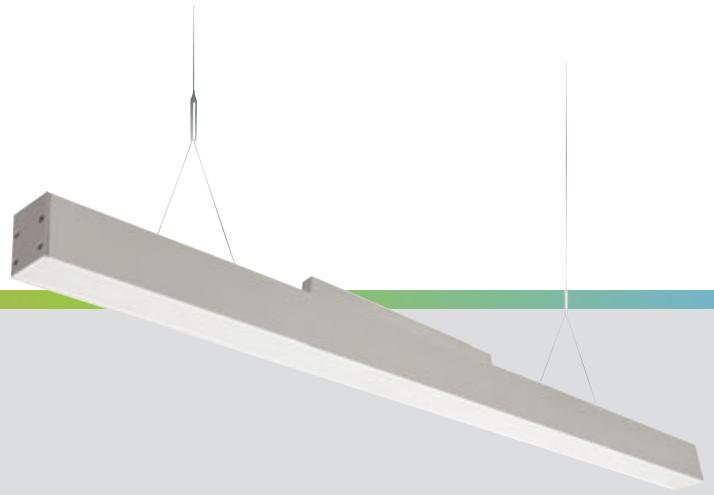

ECLIPSE LED

SET Linear Trunking Series

Features & Benefits

Fixture constructed of an extruded aluminium housing. Clip in frosted diffuser for uniform light distribution. Field adjustable cable hanger can be located at nearly any point along the fixture length. Each trunk can be installed as standalone unit or as modular unit to be assembled continuously with only one end feed. Up to 3m in single piece without joins. Continuous runs fitted with quick connects for simple, efficient wiring. Model variations offered for surface and cable suspended applications. Flexible solution for various application as vary beam optics can be selected.

Luminaire Product Description

Mounting	Surface/Pendant
Housing Material	Extruded Aluminum
Power Supply	240V 50Hz
Operating Temperature	45°C
Power Factor	0.95
Total Harmonic Distortion	≤20%
Ingress Protection	IP20
Insulation Classification	Class I
Optional Accessories	Remote Driver box, Surface mounting bracket
Life Cycle	30,000hrs/50,000hrs

Control

*Dimming Option	Fixed Output/Dali/1-10V
-----------------	-------------------------


Application

Ideal for offices, schools, commercial, hospital and residential.

Optics

Diffuser Material	Acrylic
Diffuser Pattern	Frosted

Photometric

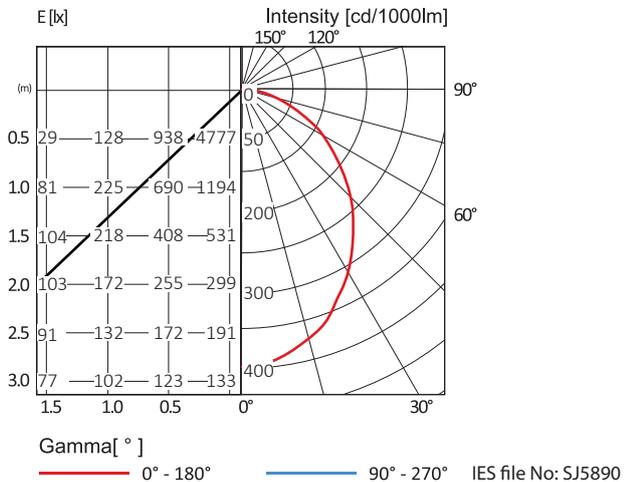


Dimension



Order Reference

Model	Number Of Module	Brand Of Component
SET	A (1 module) B (2 modules) C (3 modules) D (4 modules) E (5 modules) F (6 modules)	4 - Philips 5 - Tridonic

Example :

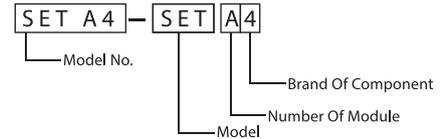

Order Information

Model No.	Dimension (LxWxH) (mm)	Driver Model	Light Source Model	Module Dimension (WxL) (mm)	Nominal Lumen Per Modules (lm) @25°C	CRI & CCT	Nominal Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
SET A4	568x50x60	CertaDrive	CertaFlux	20x560	1550	830/840/865	12	1050	88
SET A4					2200		17	1450	85
SET B4	1128x50x60				1550		23	2100	91
SET B4					2200		34	3000	88

Note : Subject to +/- 1.5mm

*Other various types are available upon request.