



Your partner in lighting technology

PLUTO LED

SL 800 Adjustable Downlight Series



Features & Benefits

An ideal energy efficient lighting solution in a variety of general purpose illumination applications. Available in white and black finishes.



Application

Ideal for restaurants, general shops, small offices, reception area & etc.

Luminaire Product Description

Mounting	Recessed
Housing Material	Die cast Aluminium
Cap Base	GU5.3
Power Supply	220-240V 50/60Hz
Operating Temperature	45°C
Power Factor	0.94
Total Harmonic Distortion	>20%
Ingress Protection	IP20
Insulation Classification	Class III
Life Cycle	25,000hrs


Light Source

Light Source Type	Philips Master LED 5.5-50W 2700K MR16 24D
CRI	80
SDCM	<6
Luminous Flux	415lm
CCT	2700K
Voltage	12V
Norminal Drive Current *If Applicable	0.64A

Control

*Dimming Option	Fixed Output/1-10V
-----------------	--------------------

Dimension

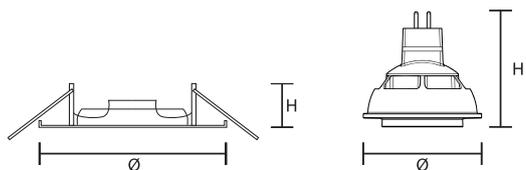

Order Information

Model No.	Dimension (Ø xH) (mm)	Driver Model	Light Source Model	CCT (K)	Nominal Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
SL 800	91x29	Philips ET-E	Philips Master LED 5.5-50W	2700	5.5	415	75

Note : Subject to +/- 1.5mm

Other various types are available upon request.