



# SONIC LED

## ECO SCR T8 Weatherproof Series

### Features

IP 65 weatherproof light fitting is a durable, robust polycarbonate base and diffuser. Gear tray retaining strap for easy installation and maintenance. Knockout and IP gland supplied for connections and through wiring. Use only the fixing brackets supplied, screws should not be used directly through the base.

### Luminaire Product Description

Mounting	Surface
Housing Material	Polycarbonate
Clips & Mounting Brackets	Stainless Steel
Light Source	SJLITE ECO Glass Tube HO
Power Supply	240V 50Hz
Power Factor	>0.9
Total Harmonic Distortion	≤20%
Ingress Protection	IP65
Insulation Classification	Class I


### Control

*Dimming Option	Fixed Output
-----------------	--------------

### Application


Ideal for car parks, loading bays, corridors, warehouses, workshops and laboratories.

### Wiring Diagram

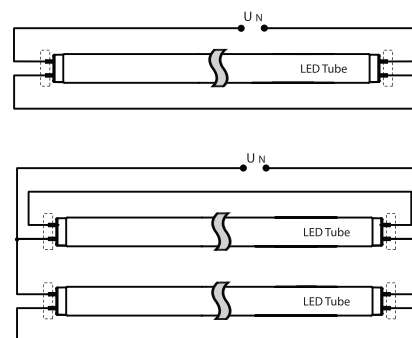




### Dimension



### Order Reference

Model	Quantity Of Tube	Length Of Tube
ECO SCR	1	A (2ft)
	2	C (4ft)

### Example :

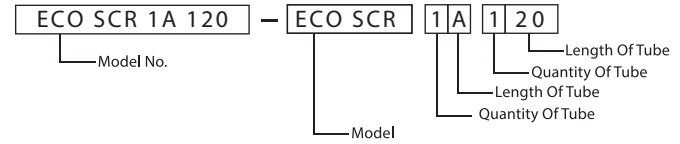

### Order Information

Model No.	No. Of Lamp	L(mm)	L1(mm)	W(mm)	W1(mm)	H(mm)	H1(mm)
ECO SCR 1A 120 (IP65)	1	660	-	85	-	87	-
ECO SCR 2A 220 (IP65)	2			134			
ECO SCR 1C 140 (IP65)	1	1269		85			
ECO SCR 2C 240 (IP65)	2			134			

Note : Subject to +/- 1.5mm

\*Other various types are available upon request.