



Your partner in lighting technology


MARS LED

SL 508 Street Light Series



Features & Benefits

Die-cast aluminum housing. Whole structure heating dissipation design with best thermal conduction and radiation. Ergonomic and dedicated light distribution are available for various roadway application.



Luminaire Product Description

Mounting	Pole
Housing Material	Die-cast Aluminum
Power Supply	240V 50Hz
Operating Temperature	-40~+50°C
Power Factor	0.95
Ingress Protection	IP66
Impact Protection	IK08
Surge Protection	10kV , 20KA
Insulation Classification	Class I
Life Cycle	50,000hrs


Application

Suitable for residential areas, parks, & parking lots.

Control


*Dimming Option NEMA receptable & photocell/shorting cap.

Photometric

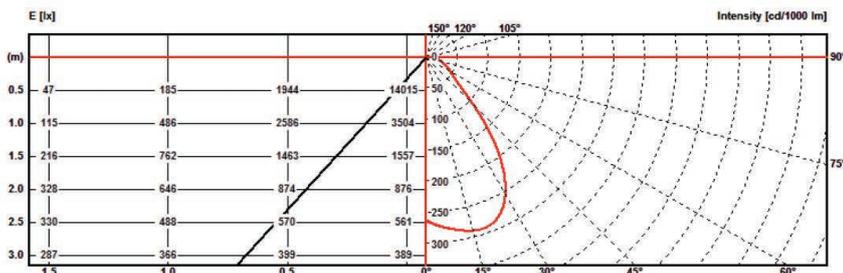

IES file No: SJ9068

Dimension

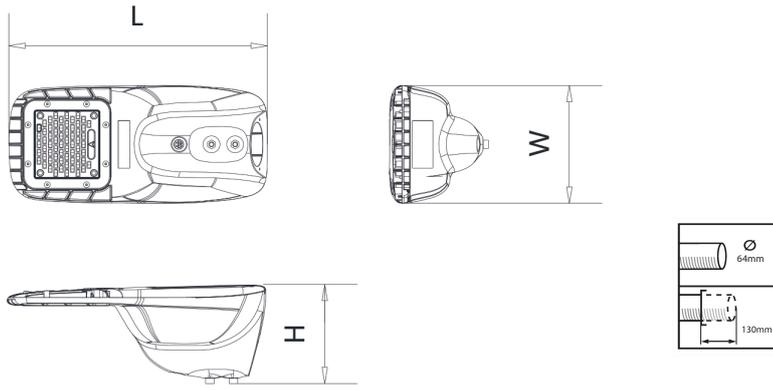

Order Information

Model No.	Dimension (LxWxH) (mm)	Driver Model	Light Source Model	CRI & CCT	Nominal Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
SL 508.60	395x180x155	MOSO	Lumileds	730/740/757	60	7320	122
SL 508.80	465x220x155				80	11040	138
SL 508.100	465x220x155				100	12900	129

Note : Subject to +/- 1.5mm

Other various types are available upon request.

