


Description

Linear narrow LED extrusion complete with opal diffuser. Suitable for surface or suspended mounting.

Application

Offices, education facilities, commercial & hospital.

Photometric

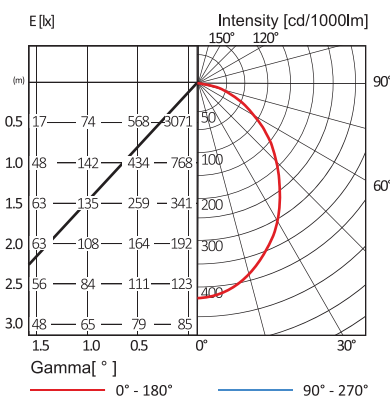

IES file No: SJ5187


Electrical

Control Gear	Tridonic
Light Source	Linear LED Strip
Wattage	24W
Lumen Output	>1800lm
CRI	80
LER	75
CCT	4000K
SDCM	<4
L70	50,000hrs

Mechanical

Construction	Extruded aluminium
Diffuser	LED Frosted

Dimension



Options

- Natural Anodized
- Epoxy Powder Coat
- Dimming
- Cyanosis
- Rod or Wire Suspended
- 3000K/6500K

Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PEF A5 Pendant	568x50x60	Tridonic	12	>900	75
PEF A5 Pendant	568x50x60	Tridonic	24	>1700	71
PEF B5 Pendant	1128x50x60	Tridonic	24	>1800	75
PEF B5 Pendant	1128x50x60	Tridonic	39	>3450	88

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.