




Description

Recessed LED troffer complete with linear prismatic diffuser.

Application

Office, education facilities, retail, commercial and hospitals.

Photometric

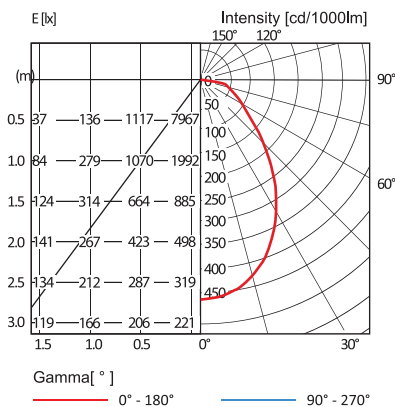

IES file No: SJ5123

Options

- 3000K/6500K
- Dimming
- Surface kits available

Electrical

Control Gear	Tridonic
Light Source	Linear LED Strip
Wattage	39W
Lumen Output	>4300lm
CRI	80
LER	110
CCT	4000K
SDCM	<4
L70	50,000hrs

Mechanical

Construction	Made of cold rolled steel
Diffuser	LED Frosted

Dimension



Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (Watt)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PWL A5 (1x2)	595x295x37	Tridonic	12	>1100	91
PWL A5 (1x2)	595x295x37	Tridonic	20	>2100	105
PWL B5 (2x2)	595x595x37	Tridonic	24	>2250	93
PWL B5 (2x2)	595x595x37	Tridonic	39	>4300	110
PWL B5 (1x4)	1195x295x37	Tridonic	24	>2250	93
PWL B5 (1x4)	1195x295x37	Tridonic	39	>4300	110
PWL B5 (2x4)	1195x595x37	Tridonic	24	>2250	93
PWL B5 (2x4)	1195x595x37	Tridonic	39	>4300	110
PWL D5 (2x4)	1195x595x37	Tridonic	48	>4550	94
PWL D5 (2x4)	1195x595x37	Tridonic	78	>8600	105

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.