





SRH 228

Designed for recess mounting ceiling or direct mounting ceiling. Diffuser designed in normal hinged type for easy maintenance, protection diffuser for squash/ tennis court. Provided even light distribution glare control and maximum light transmission, combined with a very low luminosity at angles approaching the horizontal surface. This range was designed to minimize glare and maximize light output and visual comfort together with a good degree of protection. suitable for locations where good horizontal illumination is important. Optional convert to IP54 rating type with gasket to prevent the build-up of dust and dirt. Mainly used for technical workshop, laboratories, offices and supermarkets.



**TM5 Utilization Factors**

Utilization factors			LOR =64.8% DLOR =64.8% ULOR =0.0%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	37	44	48	52	57	60	62	65	67
	0.3		32	39	44	47	53	56	59	62	65
0.5	0.1	0.2	28	35	40	44	49	53	56	60	63
	0.5		36	42	47	50	55	58	60	62	64
0.3	0.3	0.2	32	38	43	46	51	55	57	60	62
	0.1		28	35	39	43	48	52	55	58	61
0.0	0.5	0.2	35	41	45	48	53	55	57	60	62
	0.3		31	37	42	45	50	53	55	58	60
0.0	0.1	0.0	28	34	39	42	47	51	53	57	59
	0.0		27	33	37	40	45	48	51	54	56
			SHR NOM =1.25			SHR MAX =1.45			SHR MAX		
			TR =1.63								

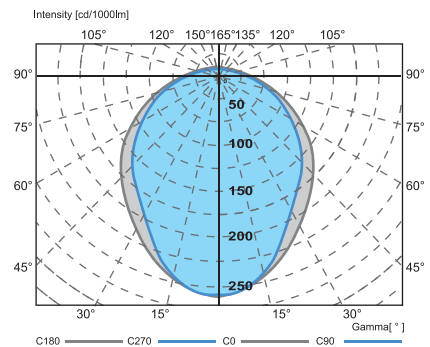

**Technical Data**

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

<b>Body</b>	Made of heavy gauge sheet steel.
<b>Diffuser</b>	Wide choice of diffuser type for selection.
<b>Paintwork</b>	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
<b>Light Source</b>	Fluorescent T5 lamp of 14W & 28W.
<b>Electrical Data</b>	240V, 50Hz, Power factor 0.95.
<b>Wire</b>	HR 105° C.
<b>Ballast</b>	Electronic Ballast.
<b>Lampholder/ Starterholder</b>	Moulded from Polycarbonate Material.

**Dimensions**

MODE NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SRH 214	2x14W	600	-	600	-	55	-
SRH 314	3x14W	600	-	600	-	55	-
SRH 414	4x14W	600	-	600	-	55	-
SRH 228 (1x4)	2x28W	1210	-	302	-	55	-
SRH 228	2x28W	1210	-	600	-	55	-
SRH 328	3x28W	1210	-	600	-	55	-
SRH 428	4x28W	1210	-	600	-	55	-



Note : Subject to +/- 1.5mm

\*Specification subject to changes without prior notice.

