





SAC 336 /W PLL

Design is available for wood ceiling recessed T-bar, with symmetrical or double parabolic louver of 16 cells version for the restricted critical angles. Wide choice of optics ensure optimum performance in any situation ideal for areas where VDT's are used. Panel and louver are manufacturing by (FMS) system for precise, accuracy and optimized product performance. Ideal for offices, schools, libraries, government building, commercial building where VDT Terminals are frequently used.

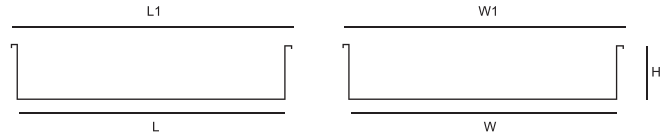

**TM5 Utilization Factors**

Utilization factors			LOR =57.7% DLOR =57.7% ULOR =0.0%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	N.A.	N.A.	52	54	57	59	60	62	63
	0.3		N.A.	N.A.	49	52	55	57	58	60	62
	0.1		N.A.	N.A.	47	49	53	55	57	59	61
0.5	0.5	0.2	N.A.	N.A.	51	53	55	57	58	60	61
	0.3		N.A.	N.A.	48	51	54	56	57	58	60
	0.1		N.A.	N.A.	47	49	52	54	56	57	59
0.3	0.5	0.2	N.A.	N.A.	50	51	54	55	56	58	58
	0.3		N.A.	N.A.	48	50	52	54	55	57	58
	0.1		N.A.	N.A.	46	48	51	53	54	56	57
0.0	0.0	0.0	N.A.	N.A.	45	47	49	51	52	53	54
			SHR NOM =2.25			SHR MAX =2.29			SHR MAX		
			TR =2.70								

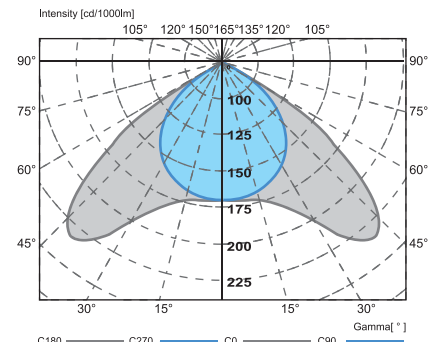

**Technical Data**

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

<b>Body</b>	Made of heavy gauge sheet steel.
<b>Louvre</b>	High quality specular anodized aluminium.
<b>Paintwork</b>	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
<b>Light Source</b>	Fluorescent PLL lamp of 36W.
<b>Electrical Data</b>	240V, 50Hz, Power factor 0.9.
<b>Wire</b>	HR 105° C.
<b>Ballast</b>	Polyester Vacuum Impregnated.
<b>Condenser</b>	Metallised Polypropylene Film.
<b>Starter</b>	SERIES(4W-22W), SINGLE(4W-80W).
<b>Lampholder/ Starterholder</b>	Moulded from Polycarbonate Material.

**Dimensions**

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SAC 236 /W PLL	2x36W	570	598	570	598	115	-
SAC 336 /W PLL	3x36W	570	598	570	598	115	-
SAC 436 /W PLL	4x36W	570	598	570	598	115	-



Note : Subject to +/- 1.5mm

\*SJ Lite reserves the right to change and amend the specification without prior notice.

