





SRI 228

Direct & Indirect light recessed mounted luminaires for T5. Provides comfortable indirect light effect. Lift or tilt, wishbone spring, rocket bolt or spring clip installations. Ideal for office, schools, libraries and commercial building.

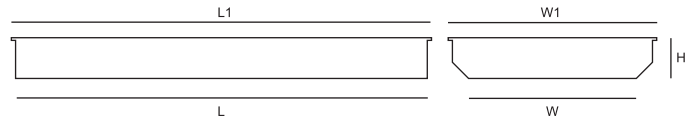

TM5 Utilization Factors

| Utilization factors | | | LOR =60.2% DLOR =59.8% ULOR =0.4% | | | | | | | | |
|---------------------|-----|-----|-----------------------------------|----|------|---------------|----|-----|---------|----|----|
| Room reflection | | | Room index | | | | | | | | |
| C | W | F | 0.75 | 1 | 1.25 | 1.5 | 2 | 2.5 | 3 | 4 | 5 |
| 0.7 | 0.5 | 0.2 | N.A. | 40 | 44 | 47 | 52 | 55 | 57 | 60 | 62 |
| | 0.3 | | N.A. | 35 | 40 | 43 | 48 | 52 | 54 | 57 | 60 |
| | 0.1 | | N.A. | 31 | 36 | 40 | 45 | 49 | 51 | 55 | 58 |
| 0.5 | 0.5 | 0.2 | N.A. | 38 | 43 | 46 | 50 | 53 | 55 | 58 | 59 |
| | 0.3 | | N.A. | 34 | 39 | 42 | 47 | 50 | 52 | 55 | 57 |
| | 0.1 | | N.A. | 31 | 35 | 39 | 44 | 48 | 50 | 54 | 56 |
| 0.3 | 0.5 | 0.2 | N.A. | 37 | 41 | 44 | 48 | 51 | 53 | 55 | 57 |
| | 0.3 | | N.A. | 33 | 38 | 41 | 46 | 48 | 51 | 54 | 55 |
| | 0.1 | | N.A. | 31 | 35 | 38 | 43 | 46 | 49 | 52 | 54 |
| 0.0 | 0.0 | 0.0 | N.A. | 29 | 33 | 37 | 41 | 44 | 46 | 49 | 51 |
| | | | SHR NOM =1.75 | | | SHR MAX =1.92 | | | SHR MAX | | |
| | | | TR =2.36 | | | | | | | | |

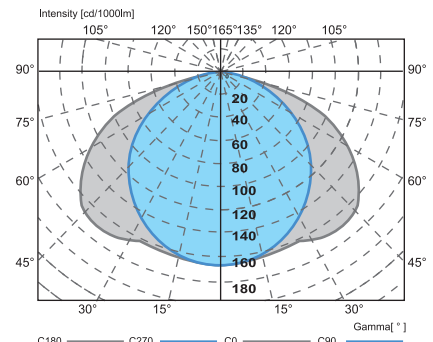

Photometry result or data are available for interior lux calculation upon requisition. Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Technical Data

| | |
|----------------------------|---|
| Body | Made of heavy gauge sheet steel. |
| Paintwork | Fully coated with a high gloss white epoxy polyester powder, giving resilient finish. |
| Light Source | Fluorescent T5- 14W, 28W. |
| Electrical Data | 240V, 50Hz, Power factor 0.95. |
| Wire | HR 105° C. |
| Ballast | Electronic Ballast. |
| Lampholder | Moulded from Polycarbonate Material. |
| Optional Components | Fused terminal block/Emergency pack. |
| | |
| | |
| | |

Dimensions

| MODEL NO. | NO. OF LAMP | L(MM) | L1(MM) | W(MM) | W1(MM) | H(MM) | H1(MM) |
|-----------|-------------|-------|--------|-------|--------|-------|--------|
| SRI 214 | 2x14W | 571 | 595 | 569 | 595 | 114 | - |
| SRI 228 | 2x28W | 1171 | 1195 | 569 | 595 | 114 | - |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |



Note : Subject to +/- 1.5mm *SJ Lite reserves the right to change and amend the specification without prior notice.

