





SRI 236

Direct & Indirect Light recessed mounted luminaires for PLL fluorescent Lamp. Provides comfortable indirect light effect. Lift or tilt, wishbone spring, rocket bolt or spring clip installations. Ideal for offices, schools, Libraries and commercial buildings.

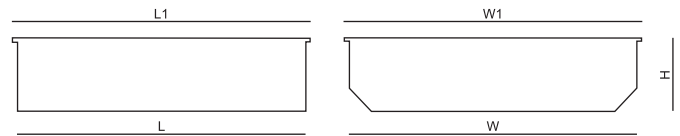

TM5 Utilization Factors

Utilization factors			LOR =44.9% DLOR =44.9% ULOR =0.0%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	N.A.	32	35	37	40	42	44	46	47
	0.3		N.A.	28	32	34	38	40	42	44	45
	0.1		N.A.	26	29	32	36	38	40	42	44
0.5	0.5	0.2	N.A.	31	34	36	39	41	42	44	45
	0.3		N.A.	28	31	33	37	39	40	42	44
	0.1		N.A.	26	29	31	35	37	39	41	43
0.3	0.5	0.2	N.A.	30	33	35	38	39	41	42	43
	0.3		N.A.	27	30	33	36	38	39	41	42
	0.1		N.A.	26	29	31	34	36	38	40	41
0.0	0.0	0.0	N.A.	24	27	30	33	35	36	38	39
						SHR NOM =1.75			SHR MAX =1.77		
			TR =2.08								

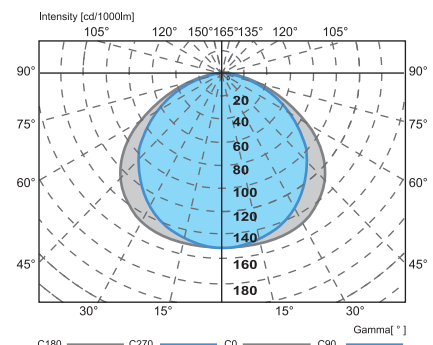

Photometry result or data are available for interior lux calculation upon requisition. Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Technical Data

Body	Made of heavy gauge sheet steel.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent PLL Lamp of 36W & 55W.
Electrical Data	240V, 50Hz, Power factor 0.95.
Wire	HR 105° C.
Ballast	Electronic Ballast.
Lampholder	Moulded from Polycarbonate Material.
Optional Components	Fused terminal block/Emergency pack.

Dimensions

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SRI 236	2x36W	576	595	575	595	146	-
SRI 255	2x55W	576	595	575	595	146	-



Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.

