





SDI 214

Direct/Indirect Light recessed mounted luminaires for T5 fluorescent Lamp. Provides comfortable indirect light effect. Lift or tilt, wishbone spring, rocket bolt or spring clip installations. Limited luminance $L \leq 1000 \text{ cd/m}^2$ at reference angle above 65° all round. Ideal for office, schools, government building and commercial building.

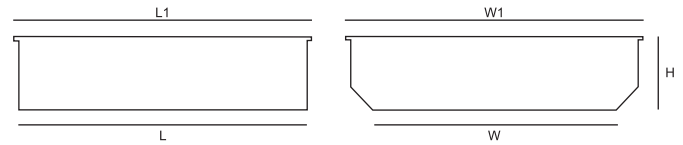

TM5 Utilization Factors

Utilization factors			LOR =59.4% DLOR =59.4% ULOR =0.0%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	44	50	53	55	58	60	62	63	64
	0.3		41	46	50	53	56	58	60	62	63
0.5	0.1	0.2	39	44	48	50	54	56	58	60	62
	0.5		44	49	52	54	57	58	60	61	62
0.3	0.3	0.2	41	46	49	52	55	57	58	60	61
	0.1		38	44	47	50	53	55	57	59	60
0.0	0.5	0.0	43	48	51	53	55	57	58	59	60
	0.3		40	45	48	51	53	55	56	58	59
0.0	0.1	0.0	38	43	47	49	52	54	55	57	58
	0.0		37	42	45	47	50	52	53	55	55
			SHR NOM =1.25			SHR MAX =1.42			SHR MAX		
			TR =1.49								

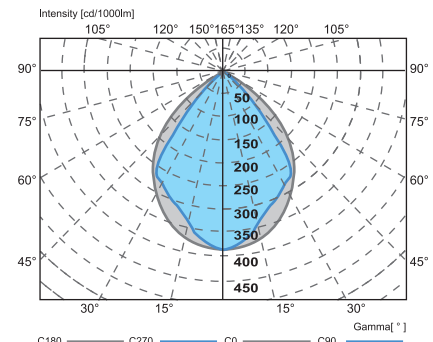

Technical Data

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Body	Made of heavy gauge sheet steel.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent T5 lamp of 14W.
Electrical Data	240V, 50Hz, Power factor 0.95.
Wire	HR 105° C.
Ballast	Electronic Ballast.
Lampholder	Moulded from Polycarbonate Material.
Optional Components	Fused terminal block/Emergency pack.

Dimensions

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SDI 214	2x14W	571	595	569	595	114	-



Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.

