





Indirect light wall mounted luminaires for T8. Provides comfortable indirect light effect. Designed for lighting objects hang on wall or vertical surfaces where directional lighting are maded as certain area. Mainly use in hospitals, school, super-markets & etc.



SAC 2A'S (220)

**TM5 Utilization Factors**

Utilization factors			LOR =51.1% DLOR =41.7% ULOR =9.3%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	NA	28	31	34	37	40	42	45	46
	0.3		NA	23	27	29	33	36	38	42	44
	0.1		NA	20	23	26	30	33	36	39	41
0.5	0.5	0.2	NA	26	29	31	34	37	38	41	42
	0.3		NA	22	25	27	31	34	36	38	40
	0.1		NA	19	22	25	28	31	33	36	38
0.3	0.5	0.2	NA	24	26	28	31	33	35	37	39
	0.3		NA	20	23	26	29	31	33	35	37
	0.1		NA	18	21	23	26	29	31	34	35
0.0	0.0	0.0	NA	16	28	20	23	25	27	29	31
			SHR NOM =1.75			SHR MAX =1.82			SHR MAX		
			TR =2.51								

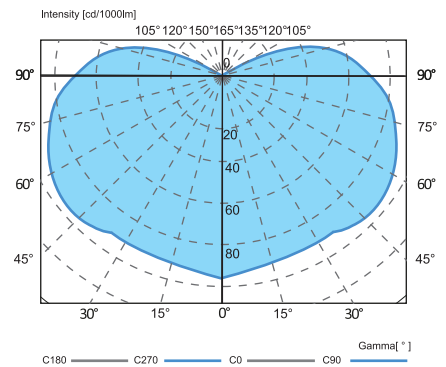

Photometry result or data are available for interior lux calculation upon requisition. Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

**Technical Data**

<b>Body</b>	Made of heavy gauge sheet steel.
<b>Paintwork</b>	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
<b>Light Source</b>	TL-D lamp of 18W & 36W.
<b>Electrical Data</b>	240V, 50Hz.
<b>Wire</b>	HR 105° C.
<b>Lampholder</b>	Moulded from Polycarbonate Material.
<b>Optional Components</b>	Louvre.
<b>Optional Light Source</b>	** SJ Lite LED Tube is compatible and replaceable (Not Compatible for ECG/Emergency fitting).

\*\*Request for advise if install other brand of LED tube.

**Dimensions**

MODEL NO.	NO. OF LAMP	L(MM)	W(MM)	H(MM)
SAC 2A'S 220	2x18W	700	160	101
SAC 2C'S 240	2x36W	1250	200	110.4

Note : Subject to +/- 1.5mm

\*SJ Lite reserves the right to change and amend the specification without prior notice.

