






PLUTO 701.035


Adjustable recessed single multi luminaires for directional light distribution system PAR lamps. High lamp position and vertically grooved black baffle ensure high lighting comfort level. Ideal for commercial building, offices, conference rooms, department, stores, fashion shops, etc.



**TM5 Utilization Factors**

Utilization factors			LOR =61.0% DLOR =61.0% ULOR =0.0%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	45	50	54	56	59	61	63	65	66
			42	47	50	53	57	59	61	63	64
	0.3	0.1	39	44	48	51	55	57	59	61	63
0.5	0.5	0.2	45	49	52	55	58	59	61	62	63
	0.3	0.1	41	46	50	52	55	57	59	61	62
0.3	0.5	0.2	39	44	47	50	54	56	58	60	61
			44	48	51	53	56	58	59	60	61
	0.3	0.1	41	46	49	51	54	56	57	59	60
0.0	0.0	0.0	39	44	47	49	53	55	56	58	59
			38	42	45	48	51	52	54	55	57

SHR NOM =0.50 SHR MAX =0.63 SHR MAX TR =0.63

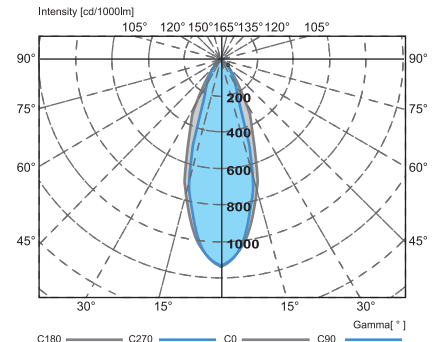

Photometry result or data are available for interior lux calculation upon requisition. Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

**Technical Data**

<b>Body</b>	Made of cold rolled steel.
<b>Ring</b>	Made of die-cast aluminium.
<b>Paintwork</b>	Coated with a high gloss white/black epoxy polyester powder, giving resilient finish.
<b>Light Source</b>	Halogen lamp of ARIII, Halogen A Pro 35W
<b>Electrical Data</b>	240V, 50Hz
<b>Wattage</b>	35W
<b>Wire</b>	Silicone heat resistance cable.
<b>Lampholder</b>	E27
<b>Control Gear Box</b>	Separate.
<b>Optional Light Source</b>	LED PAR30 is compatible and replaceable.

**Dimensions** L207(MM) W207(MM) H161(MM)

MODEL NO.	NO. OF LAMP
PLUTO 701.035	1X35W

MODEL NO.	NO. OF LAMP



Note : Subject to +/- 1.5mm

\*SJ Lite reserves the right to change and amend the specification without prior notice.

