





Adjustable recessed downlight for halogen lamp. Suitable for offices, commercial halls, museums, galleries, exhibitions, etc.



TM5 Utilization Factors

Utilization factors			LOR =67.4% DLOR =67.4% ULOR =0.0%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	51	57	60	63	66	69	70	72	73
			48	53	57	60	64	66	68	70	72
			45	51	54	57	61	64	66	69	70
0.5	0.5	0.2	50	56	59	61	64	66	68	69	70
			47	52	56	59	62	64	66	68	69
			45	50	54	56	60	63	64	67	68
0.3	0.5	0.2	50	54	58	60	63	64	65	67	68
			47	52	55	58	61	63	64	66	67
			44	50	53	56	59	61	63	65	66
0.0	0.0	0.0	43	48	52	54	57	59	60	62	63
			SHR NOM =0.50			SHR MAX =0.67			SHR MAX		
			TR =0.67								

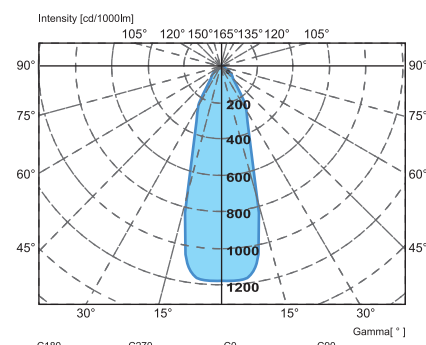

Technical Data

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Body & Ring	Made of compress cold rolled steel.
Paintwork	Coated with a high gloss white/black epoxy polyester powder, giving resilient finish.
Light Source	Halogen bulb 35W/50W.
Electrical Data	240V, 50Hz
Transformer	12V 35W/50W
Lampholder	GU5.3
Optional Light Source	LED MR16 is compatible and replaceable.

Dimensions

MODEL NO.	COLOR
PLUTO 803.035	WHITE

MODEL NO.	COLOR
PLUTO 803.050	WHITE



Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.