





Fixed recessed downlight for halogen lamp with deep set lamp to avoid glare & ensure comfortable lighting. Suitable for offices, commercial halls, museums, galleries, exhibitions, etc.



**TM5 Utilization Factors**

Utilization factors			LOR =46.2% DLOR =46.2% ULOR =0.0%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	40	42	44	46	47	48	49	50	51
	0.3		38	40	42	44	46	47	48	49	50
	0.1		36	39	41	42	44	46	47	48	49
0.5	0.5	0.2	39	42	43	44	46	47	48	48	49
	0.3		37	40	42	43	45	46	47	48	48
	0.1		36	39	40	42	44	45	46	47	48
0.3	0.5	0.2	38	41	42	43	45	46	46	47	47
	0.3		37	39	41	42	44	45	45	46	47
	0.1		36	38	40	41	43	44	45	46	46
0.0	0.0	0.0	35	37	39	40	41	42	43	44	44
			SHR NOM =1.25			SHR MAX =1.26			SHR MAX		
			TR =1.32								

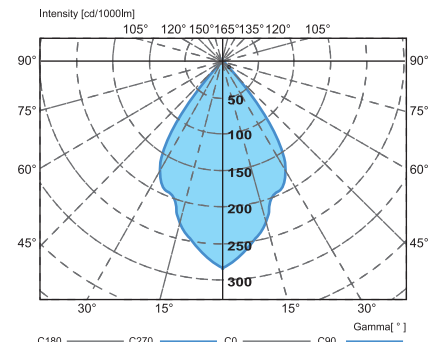

**Technical Data**

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

<b>Body &amp; Ring</b>	Made of compress cold rolled steel.
<b>Paintwork</b>	Coated with a high gloss white epoxy polyester powder, giving resilient finish.
<b>Light Source</b>	Halogen bulb 35W/50W.
<b>Electrical Data</b>	240V, 50Hz
<b>Transformer</b>	12V 35W/50W
<b>Lampholder</b>	GU5.3
<b>Optional Light Source</b>	LED MR16 is compatitble and replaceable.

**Dimensions**

Q110 H25(MM)

MODEL NO.	COLOR
PLUTO 811.035	WHITE
PLUTO 811.035	SILVER
PLUTO 811.035	GOLD

MODEL NO.	COLOR
PLUTO 811.050	WHITE
PLUTO 811.050	SILVER
PLUTO 811.050	GOLD



Note : Subject to +/- 1.5mm

\*SJ Lite reserves the right to change and amend the specification without prior notice.

