





Fixed recessed downlight for halogen lamp with deep set lamp to avoid glare & ensure comfortable lighting. Suitable for offices, commercial halls, museums, galleries, exhibitions, etc.

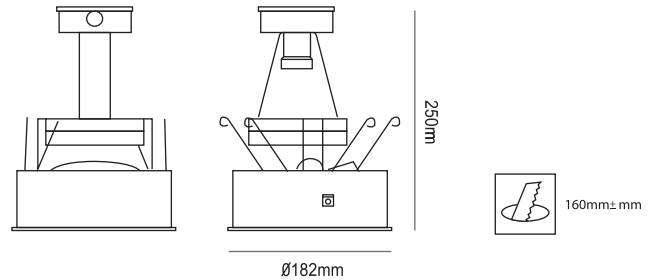

**TM5 Utilization Factors**

Utilization factors			LOR =84.4% DLOR =84.4% ULOR =0.0%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	69	75	79	82	85	88	89	91	93
			65	71	75	78	82	85	87	89	91
0.5	0.5	0.2	62	68	72	75	80	83	85	88	89
			68	73	77	80	83	85	86	88	89
0.3	0.3	0.2	64	70	74	77	80	83	84	86	88
			61	67	71	74	78	81	83	85	87
0.0	0.0	0.0	67	72	75	78	81	82	84	85	86
			64	69	73	75	79	81	82	84	85
0.0	0.0	0.0	61	67	71	73	77	79	81	83	84
			60	65	69	71	74	76	77	79	80
			SHR NOM =0.75		SHR MAX =0.95		SHR MAX				
			TR =0.95								

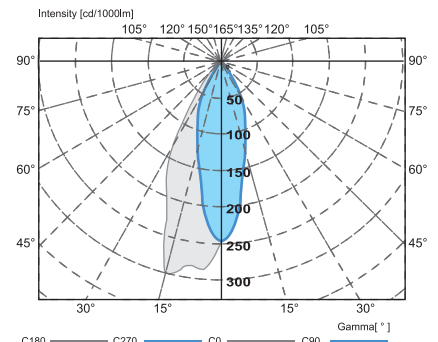

**Technical Data**

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

<b>Body &amp; Ring</b>	Made of compress cold rolled steel.
<b>Paintwork</b>	Coated with a high gloss white epoxy polyester powder, giving resilient finish.
<b>Light Source</b>	PAR 38/CDM-R 70W/Halogen A-Pro 75W.
<b>Electrical Data</b>	240V, 50Hz
<b>Lampholder</b>	E27

**Dimensions**

Q110 H25(MM)

MODEL NO.	COLOR
PLUTO 900	WHITE

MODEL NO.	COLOR



Note : Subject to +/- 1.5mm

\*SJ Lite reserves the right to change and amend the specification without prior notice.

