





SB 128

Suitable for ceiling, wall or pendant mounting using suspension system. Provide maximum efficiency and economical. Discrete appearance achieved with adjustable lampholders. Cover plate held securely by treaded nut, offering large screw area using hand for fast installation. Ideal for office, schools, libraries, government building and commercial building.

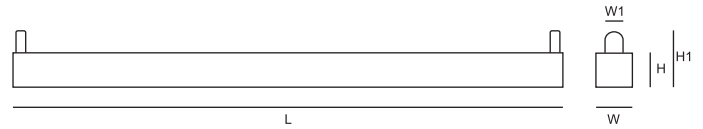

TM5 Utilization Factors

Utilization factors			LOR =93.4% DLOR =75.3% ULOR =18.1%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	N.A.	51	57	62	69	73	77	82	85
	0.3		N.A.	43	49	54	62	67	71	76	80
	0.1		N.A.	37	43	48	56	61	66	72	76
0.5	0.5	0.2	N.A.	47	53	57	63	67	70	75	77
	0.3		N.A.	40	46	51	57	62	65	70	74
	0.1		N.A.	35	41	45	52	57	61	67	70
0.3	0.5	0.2	N.A.	43	48	52	58	61	64	68	71
	0.3		N.A.	38	43	47	53	57	60	65	68
	0.1		N.A.	33	38	43	49	53	57	62	65
0.0	0.0	0.0	N.A.	29	33	37	42	46	49	54	57
			SHR NOM =1.75		SHR MAX =1.96			SHR MAX			
			TR =2.58								

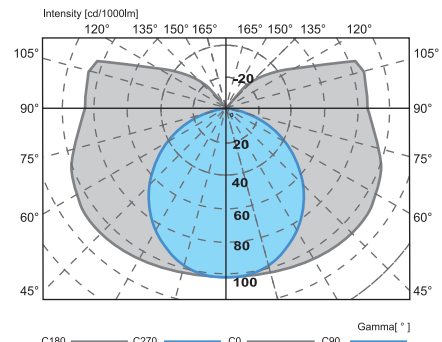

Technical Data

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Body	Made of heavy gauge sheet steel.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent T5 14/24W, 21/39W, 28/54W, 35/49W.
Electrical Data	240V, 50Hz, Power factor 0.95.
Wire	HR 105° C.
Ballast	Electronic Ballast.
Lampholder	Moulded from Polycarbonate Material.
Optional Components	Fused terminal block.

Dimensions

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SB 114	1x14W/24W	571	-	38	-	35	58
SB 214	2x14W/24W	571	-	38	67	35	60
SB 121	1x21W/39W	871	-	38	-	35	58
SB 221	2x21W/39W	871	-	38	67	35	60
SB 128	1x28W/54W	1171	-	38	-	35	58
SB 228	2x28W/54W	1171	-	38	67	35	60
SB 135	1x35W/49W	1471	-	38	-	35	58
SB 235	2x35W/49W	1471	-	38	67	35	60



Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.

