





SBY 128

Suitable for ceiling mounting or pendant mounting with suspension system. Symmetrical metal reflector for directional light distribution. Reflector held securely by treaded nut, offering large screw area using hand for fast installation. Allow a wide and efficient direct distribution of light. Discrete appearance achieved with adjustable lampholder. End to end continuously mounting from preformed punch out type without additional drilling required. Ideal for direct wide distribution application.

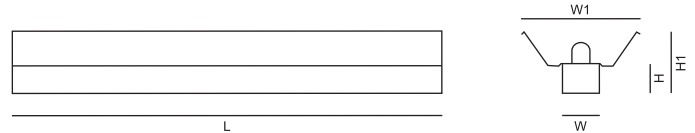

**TM5 Utilization Factors**

Utilization factors			LOR =79.0% DLOR =79.0% ULOR =0.0%									
Room reflection			Room index									
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5	
0.7	0.5	0.2	47	54	60	64	69	73	76	79	82	
	0.3		41	48	54	58	64	69	72	76	79	
0.5	0.1	0.2	37	43	49	54	60	65	68	73	76	
	0.5		46	52	58	61	67	70	73	76	78	
0.3	0.3	0.2	40	47	53	57	63	67	69	73	76	
	0.1		37	43	49	53	59	63	67	71	74	
0.0	0.5	0.0	45	51	56	59	64	68	70	73	75	
	0.3		40	46	52	55	61	65	67	71	73	
0.0	0.1	0.0	36	42	48	52	58	62	65	69	72	
	0.0		35	40	46	50	55	59	62	65	68	
			SHR NOM =1.50				SHR MAX =1.68		SHR MAX			
			TR =1.92									

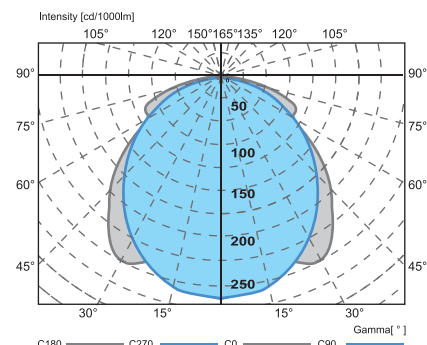

**Technical Data**

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

<b>Body</b>	Made of heavy gauge sheet steel.
<b>Reflector</b>	Aluminium reflector.
<b>Paintwork</b>	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
<b>Light Source</b>	Fluorescent T5 14W & 28W.
<b>Electrical Data</b>	240V, 50Hz, Power factor 0.95.
<b>Wire</b>	HR 105° C.
<b>Ballast</b>	Electronic ballast.
<b>Lampholder/ Starterholder</b>	Moulded from Polycarbonate Material.

**Dimensions**

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SBY 114	1X14W	572	-	38	91	35	60
SBY 214	2X14W	572	-	38	140	35	60
SBY 128	1X28W	1171	-	38	91	35	60
SBY 228	2X28W	1171	-	38	140	35	60
SBY 135	1X35W	1470	-	38	91	35	60
SBY 235	2X35W	1470	-	38	140	35	60



Note : Subject to +/- 1.5mm

\*SJ Lite reserves the right to change and amend the specification without prior notice.