





SB 240 M Type

Suitable for ceiling or pendant mounting with suspension system. Mirror reflector held securely by treaded nut, offering large screw area using hand for fast installation. Allow a wide and efficient distribution of light. End to end continuously mounting from performed punch out type without additional drilling required. Recommended for use where lighting needs to be concentrated on certain areas.



TM5 Utilization Factors

Utilization factors			LOR =77.5% DLOR =77.5% ULOR =0.0%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	N.A.	55	59	63	69	72	75	78	80
	0.3		N.A.	49	51	58	64	68	71	75	77
0.5	0.1	0.2	N.A.	45	49	54	60	64	68	72	75
	0.5		N.A.	53	57	61	66	69	72	75	77
0.3	0.3	0.2	N.A.	48	53	56	62	66	69	72	75
	0.1		N.A.	45	49	53	59	63	66	70	73
0.0	0.5	0.2	N.A.	52	56	59	64	67	69	72	74
	0.3		N.A.	48	52	55	61	64	67	70	72
0.0	0.1	0.0	N.A.	44	48	52	58	62	64	68	70
	0.0		N.A.	42	46	50	55	59	61	65	67
			SHR NOM =2.00		SHR MAX =2.06			SHR MAX			
			TR =2.40								

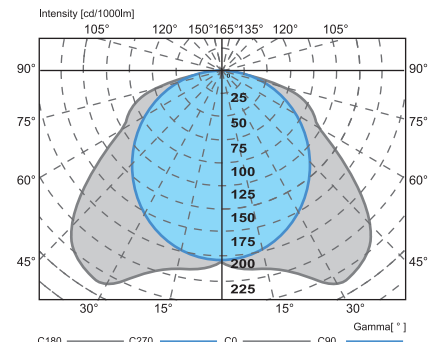

Photometry result or data are available for interior lux calculation upon requisition. Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Technical Data

Body	Made of heavy gauge sheet steel.
Reflector	Aluminum Reflector.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent TLD lamp of 36W.
Electrical Data	240V, 50Hz, Power factor 0.9.
Wire	HR 105° C.
Ballast	Polyester Vacuum Impregnated.
Condenser	Metallised Polypropylene Film.
Starter	SERIES(4W-22W), SINGLE(4W-80W).
Lampholder/ Starterholder	Moulded from Polycarbonate Material.
Optional Component	Fused terminal block/Electronic ballast/Emergency packs.
Optional Light Source	** SJ Lite LED Tube is compatitble and replaceable (Not compatible for ECG/Emergency fitting).

**Request for advise if install other brand of LED tube.

Dimensions

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SB 240 (M Type)	2x36W	1222	-	150	208	51	80



Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.

