



Designed for exposed mounting to T-bar ceiling grid. Diffuser designed attached on T-Bar. Provided even light distribution and glare control. Mainly used for offices, supermarkets and complexes.

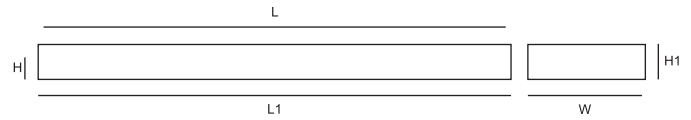

SAC 240

TM5 Utilization Factors

Utilization factors			LOR =57.8% DLOR =57.8% ULOR =0.0%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	32	38	43	46	50	53	55	58	59
	0.3		28	34	38	41	46	50	52	55	57
0.5	0.1	0.2	24	30	35	38	43	47	49	53	55
	0.5		31	37	41	44	48	51	53	55	57
0.3	0.3	0.2	27	33	37	41	45	48	50	53	55
	0.1		24	30	34	38	42	46	48	51	54
0.0	0.5	0.0	31	36	40	43	46	49	51	53	55
	0.3		27	32	37	40	44	47	49	52	53
0.0	0.1	0.0	24	30	34	37	42	45	47	50	52
	0.0		23	28	32	35	40	42	45	47	49
			SHR NOM =1.25		SHR MAX =1.45		SHR MAX		TR =1.61		

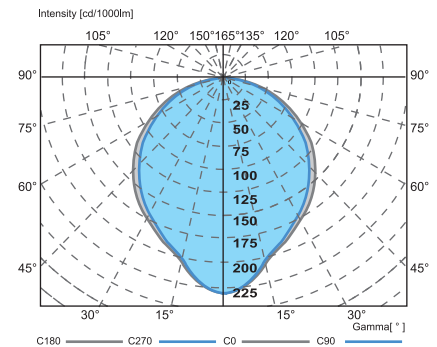

Technical Data

Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Body	Made of heavy gauge sheet steel.
Diffuser	Wide choice of diffuser type for selection.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent TLD lamp of 18W, 36W.
Electrical Data	240V, 50Hz, Power factor 0.9.
Wire	HR 105° C.
Ballast	Polyester Vacuum Impregnated.
Condenser	Metallised Polypropylene Film.
Starter	SERIES(4W-22W), SINGLE(4W-80W).
Lampholder/ Starterholder	Moulded from Polycarbonate Material.
Optional Component	Fused terminal block/Electronic ballast/Emergency pack.
Optional Light Source	** SJ Lite LED Tube is compatible and replaceable (Not compatible for ECG/Emergency fitting).

Dimensions

**Request for advise if install other brand of LED tube.

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SAC 120 (1x2)	1x18W	602	612	302	-	59	97
SAC 220 (1x2)	2x18W	602	612	302	-	59	97
SAC 220	2x18W	602	612	605	-	59	97
SAC 320	3x18W	602	612	605	-	59	97
SAC 420	4x18W	602	612	605	-	59	97
SAC 140	1x36W	1212	1222	302	-	59	97
SAC 240 (1x4)	2x36W	1212	1222	302	-	59	97
SAC 240	2x36W	1212	1222	605	-	59	97
SAC 340	3x36W	1212	1222	605	-	59	97
SAC 440	4x36W	1212	1222	605	-	59	97



Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.

