





SRM 228

Designed for recess imperial exposed T-bar ceiling mounting with single parabolic mirror optic louvre with christmas profile cross blades. Louvres reflection by means of slide lock set and can be lowered and hang from either side. Mainly used for general lighting in offices, supermarkets and complexes.



TM5 Utilization Factors

Utilization factors			LOR=85.8%	DLOR=85.8%	ULOR=0.0%	Room index					
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	N.A.	61	67	71	77	81	84	87	89
	0.3		N.A.	55	61	65	72	76	80	84	87
0.5	0.1		N.A.	50	56	61	68	73	76	81	84
	0.5	0.2	N.A.	59	65	69	74	78	80	84	86
0.3	0.3		N.A.	54	60	64	70	74	77	81	84
	0.1		N.A.	50	56	60	67	71	74	79	81
0.0	0.5	0.2	N.A.	58	63	67	72	75	78	81	83
	0.3		N.A.	53	58	63	68	72	75	78	81
0.0	0.1		N.A.	49	55	59	65	69	72	76	79
	0.0	0.0	N.A.	47	52	57	62	66	69	73	75
			SHR NOM=1.75			SHR MAX=1.82			SHR MAX		
			TR=2.30								

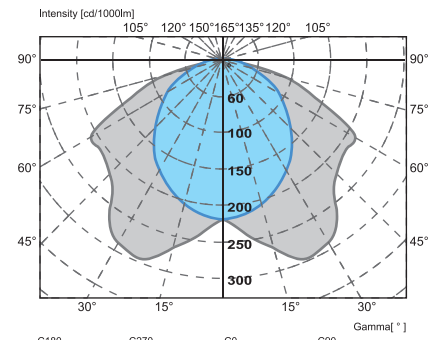

Photometry result or data are available for interior lux calculation upon requisition. Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Technical Data

<b>Body</b>	Made of heavy gauge sheet steel.
<b>Louvers</b>	Anodised aluminium in either specular, semi specular or matt with profile cross blades.
<b>Paintwork</b>	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
<b>Light Source</b>	Fluorescent T5 lamp of 14W, 28W.
<b>Electrical Data</b>	240V, 50Hz, Power factor 0.95.
<b>Wire</b>	HR 105° C.
<b>Ballast</b>	Electronic Ballast.
<b>Lampholder</b>	Moulded from Polycarbonate Material.
<b>Optional components</b>	Fused terminal block/Emergency packs.

Dimensions

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SRM 214 (1x2)	2X14W	600	-	302	-	55	-
SRM 214	2X14W	600	-	600	-	55	-
SRM 314	3X14W	600	-	600	-	55	-
SRM 414	4X14W	600	-	600	-	55	-
SRM 128	1X28W	1210	-	302	-	55	-
SRM 228	2X28W	1210	-	600	-	55	-
SRM 228 (1x4)	2x28W	1210	-	302	-	55	-
SRM 328	3X28W	1210	-	600	-	55	-
SRM 428	4X28W	1210	-	600	-	55	-



Note : Subject to +/- 1.5mm

\*SJ Lite reserves the right to change and amend the specification without prior notice.

