





Designed for recess mounting on wood or plaster ceiling. Diffuser designed in hinged type form. Provided even light distribution and glare control.



SWH 228

TM5 Utilization Factors

Utilization factors			LOR =64.8%		DLOR =64.8%		ULOR =0.0%				
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	37	44	48	52	57	60	62	65	67
	0.3		32	39	44	47	53	56	59	62	65
	0.1		28	35	40	44	49	53	56	60	63
0.5	0.5	0.2	36	42	47	50	55	58	60	62	64
	0.3		32	38	43	46	51	55	57	60	62
	0.1		28	35	39	43	48	52	55	58	61
0.3	0.5	0.2	35	41	45	48	53	55	57	60	62
	0.3		31	37	42	45	50	53	55	58	60
	0.1		28	34	39	42	47	51	53	57	59
0.0	0.0	0.0	27	33	37	40	45	48	51	54	56
			SHR NOM =1.25		SHR MAX =1.45		SHR MAX TR =1.63				

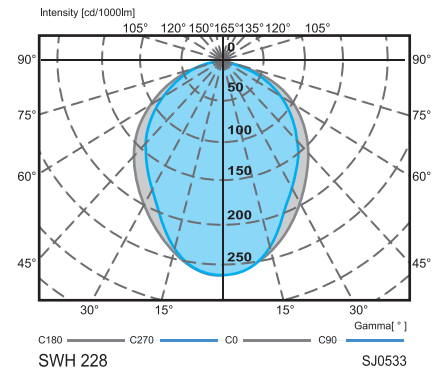

Photometry result or data are available for interior lux calculation upon requisition. Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Technical Data

Body	Made of heavy gauge sheet steel.
**Diffuser	Wide choice of diffuser type for selection.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent T5 - 28W.
Electrical Data	240V, 50Hz, Power factor 0.95
Wire	HR 105° C
Ballast	Electronic Ballast.
Lampholder/ Starterholder	Moulded from Polycarbonate Material.

Dimensions

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)
SWH 128	1x28W	1208	1173	300	265	60
SWH 228	2x28W	1208	1173	598	563	60
SWH 328	3x28W	1208	1173	598	563	60
SWH 428	4x28W	1208	1173	598	563	60

Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.

