



# AURORAS **LED**

## ECO SAC T8 HD Fitting Series

### Features

Designed for exposed T-bar ceiling grid. Diffuser designed in normal hinged for either side for easy maintenance. Provided even light transmission, combined with a very low luminosity at angle approaching the horizontal surface. This range was designed to minimize glare and maximize light output and visual comfort together with a good degree of protection.

### Luminaire Product Description

Mounting	Recessed
Housing Material	Cold Roll Steel
Coating	Epoxy Polyester Powder
Light Source	SJLITE ECO Glass Tube HO
Input Voltage	240V~, 50Hz
Power Factor	>0.9
Ingress Protection	IP20
Insulation Classification	Class I

### Optics


Diffuser Material	Polystyrene
Diffuser Type	Wide choice of diffuser type for selection



### Application

Suitable for locations where good horizontal illumination is important.

### Wiring Diagram

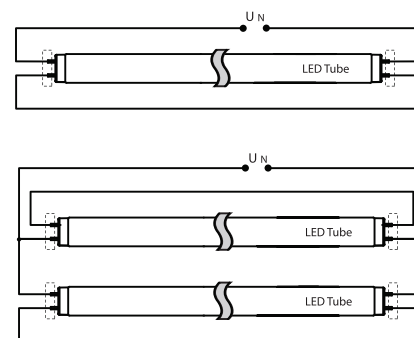


### Control

\*Dimming Option      Fixed Output




### Dimension



### Order Reference

Model	Quantity Of Tube	Length Of Tube
ECO SAC	1	A (2ft)
	2	C (4ft)
	3	
	4	

### Example :

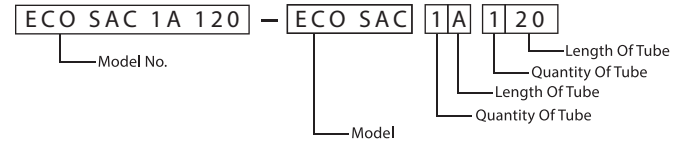

### Order Information

Model No.	No. Of Lamp	L(mm)	L1(mm)	W(mm)	W1(mm)	H(mm)	H1(mm)
ECO SAC 2A 220 (HD)	2	612	602	605	-	97	59
ECO SAC 3A 320 (HD)	3						
ECO SAC 4A 420 (HD)	4						
ECO SAC 2C 240 (HD)	2	1222	1212	605			

Note : Subject to +/- 1.5mm

\*Other various types are available upon request.