





2, 4 or 6 lamps control configuration to match conventional type metal halide fixtures output from 250W- 400W. Easy mounting options from direct ceiling, rigid suspension rod or flexible chain mounting. Precise control of light distribution at high mounting height. Mainly used for technical workshop, warehouse, laboratories, offices and supermarkets.



SRH 454 HB

TM5 Utilization Factors

Utilization factors			LOR =91.2% DLOR =91.2% ULOR =0.0%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	55	64	71	75	82	86	89	93	96
	0.3		48	57	64	69	77	82	85	90	93
	0.1		43	52	59	65	72	78	81	87	90
	0.5		54	62	68	73	79	83	86	90	92
0.5	0.3	0.2	48	56	63	68	75	79	82	87	89
	0.1		43	52	59	64	71	76	79	84	87
0.3	0.5	0.2	52	61	66	71	77	80	83	86	88
	0.3		47	55	62	66	73	77	80	84	86
	0.1		43	51	58	63	70	74	78	82	85
	0.0		41	49	55	60	67	71	74	78	80
			SHR NOM =0.75		SHR MAX =0.85			SHR MAX			
			TR =0.85								

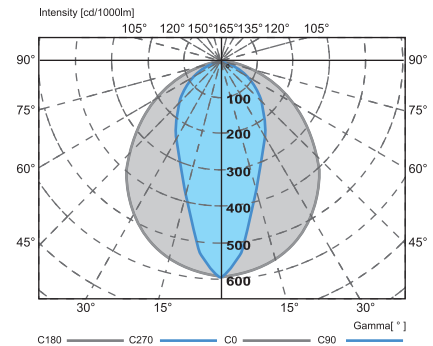

Photometry result or data are available for interior lux calculation upon requisition. Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

Technical Data

Body	Made of heavy gauge sheet steel.
Reflector	High quality anodized aluminum.
Paintwork	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
Light Source	Fluorescent T5 - 54W.
Electrical Data	240V, 50Hz, Power factor 0.95.
Wire	HR 105° C.
Gasket (Optional)	Elastomeric Nitrile Foam Material.
Ballast	Electronic Ballast.
Lampholder/ Starterholder	Moulded from Polycarbonate Material.
Optional components	Fused terminal block/Emergency pack.

Dimensions

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SRH 254 HB	2x54W	1195	-	437	595	70	-
SRH 354 HB	3x54W	1195	-	437	595	70	-
SRH 454 HB	4x54W	1195	-	437	595	70	-
SRH 654 HB	6x54W	1195	-	437	595	70	-



Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.

