



2, 4 or 6 lamps control configuration to match conventional type metal halide fixtures output from 250W- 400W. Easy mounting options from direct ceiling, rigid suspension rod or flexible chain mounting. Precise control of light distribution at high mounting height. Mainly used for technical workshop, warehouse, laboratories, offices and supermarkets.



SSE 454 HB

**TM5 Utilization Factors**

Utilization factors			LOR =90.7% DLOR =90.7% ULOR =0.0%									
Room reflection			Room index									
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5	
0.7	0.5	0.2	53	62	68	72	79	83	86	90	93	
			46	55	61	66	73	78	82	87	90	
	0.1	41	50	56	61	68	74	78	83	87		
0.5	0.5	0.2	52	60	66	70	76	80	83	87	89	
			45	54	60	65	71	76	79	84	86	
	0.1	41	49	55	60	67	72	76	81	84		
0.3	0.5	0.2	50	58	64	68	73	77	80	83	86	
			45	53	59	63	69	74	77	81	83	
	0.1	40	49	55	59	66	70	74	78	81		
0.0	0.5	0.2	38	46	52	56	63	67	70	74	77	
			38	46	52	56	63	67	70	74	77	
	0.0	SHR NOM =1.25 SHR MAX =1.39 SHR MAX TR =1.48										

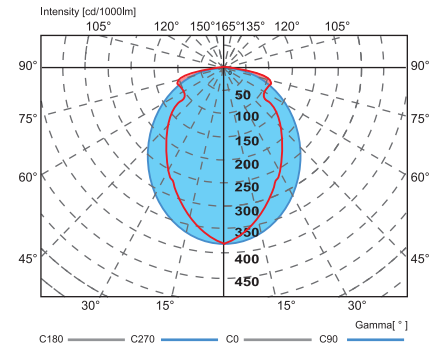

**Technical Data**

Photometry result or data are available for interior lux calculation upon requisition. Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

<b>Body</b>	Made of heavy gauge sheet steel.
<b>Diffuser (Optional)</b>	Clear acrylic diffuser / another diffuser etc.
<b>Paintwork</b>	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
<b>Light Source</b>	Fluorescent T5 - 54W high performance lamps.
<b>Electrical Data</b>	240V, 50Hz, Power factor 0.95.
<b>Wire</b>	HR 105° C.
<b>Ballast</b>	Electronic Ballast.
<b>Lampholder</b>	Moulded from Polycarbonate Material.
<b>Optional components</b>	Emergency pack, Dali, DSI dimming ballast.

**Dimensions**

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SSE 254 HB	2x54W	1176	-	182	-	70.8	-
SSE 454 HB	4x54W	1176	-	246.6	-	70.8	-
SSE 654 HB	6x54W	1176	-	366.5	-	105	-



Note : Subject to +/- 1.5mm

\*SJ Lite reserves the right to change and amend the specification without prior notice.

