





SSH 454/HB

2, 4 or 6 lamps control configuration to match conventional type metal halide fixtures output from 250W- 400W. Easy mounting options from direct ceiling, rigid suspension rod or flexible chain mounting. Precise control of light distribution at high mounting height. Mainly used for technical workshop,warehouse, laboratories, offices and supermarkets.



**TM5 Utilization Factors**

Utilization factors			LOR =91.2% DLOR =91.2% ULOR =0.0%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	55	64	71	75	82	86	89	93	96
	0.3		48	57	64	69	77	82	85	90	93
0.5	0.1	0.2	43	52	59	65	72	78	81	87	90
	0.5		54	62	68	73	79	83	86	90	92
0.3	0.3	0.2	48	56	63	68	75	79	82	87	89
	0.1		43	52	59	64	71	76	79	84	87
0.0	0.5	0.0	52	61	66	71	77	80	83	86	88
	0.3		47	55	62	66	73	77	80	84	86
0.0	0.1	0.0	43	51	58	63	70	74	78	82	85
	0.0		41	49	55	60	67	71	74	78	80
			SHR NOM =0.75		SHR MAX =0.85		SHR MAX				
			TR =0.85								

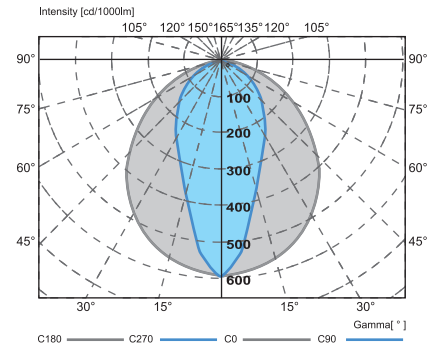

Photometry result or data are available for interior lux calculation upon requisition. Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.

**Technical Data**

<b>Body</b>	Made of heavy gauge sheet steel.
<b>Reflector</b>	High quality anodized aluminum.
<b>Paintwork</b>	Fully coated with a high gloss white epoxy polyester powder, giving resilient finish.
<b>Light Source</b>	Fluorescent T5 - 54W.
<b>Electrical Data</b>	240V, 50Hz, Power factor 0.95.
<b>Wire</b>	HR 105° C.
<b>Gasket (Optional)</b>	Elastomeric Nitrile Foam Material.
<b>Ballast</b>	Electronic Ballast.
<b>Lampholder/ Starterholder</b>	Moulded from Polycarbonate Material.
<b>Optional components</b>	Fused terminal block/Emergency pack.

**Dimensions**

MODEL NO.	NO. OF LAMP	L(MM)	L1(MM)	W(MM)	W1(MM)	H(MM)	H1(MM)
SSH 254/HB	2x54W	1195	-	260	-	70	-
SSH 454/HB	4x54W	1195	-	433	-	70	-
SSH 654/HB	6x54W	1195	-	613	-	70	-



Note : Subject to +/- 1.5mm

\*SJ Lite reserves the right to change and amend the specification without prior notice.

