





VENUS 100.250MH

Wide angle optical system with symmetrical light distribution. Surface or suspended luminaire for low ceiling mounting. Wire mesh / Tempered glass provide optimum lamp protection. Mainly used for factories, warehouse, workshops.

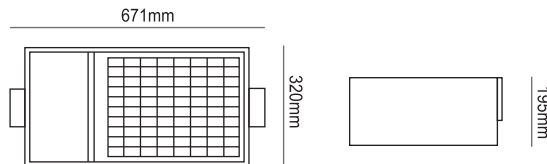

TM5 Utilization Factors

Utilization factors			LOR =69.8% DLOR =69.8% ULOR =0.0%								
Room reflection			Room index								
C	W	F	0.75	1	1.25	1.5	2	2.5	3	4	5
0.7	0.5	0.2	N.A.	51	56	59	64	67	69	71	73
			N.A.	46	51	55	60	63	66	69	71
			N.A.	43	48	51	57	60	63	67	69
0.5	0.5	0.2	N.A.	50	54	57	61	64	66	69	70
			N.A.	46	50	54	58	61	64	67	69
			N.A.	42	47	51	56	59	61	65	67
0.3	0.5	0.2	N.A.	48	53	55	60	62	64	66	68
			N.A.	45	49	52	57	60	62	64	66
			N.A.	42	46	50	55	58	60	63	65
0.0	0.0	0.0	N.A.	40	45	48	52	55	57	60	62
						SHR NOM =1.75 SHR MAX =1.78 SHR MAX TR =1.96					

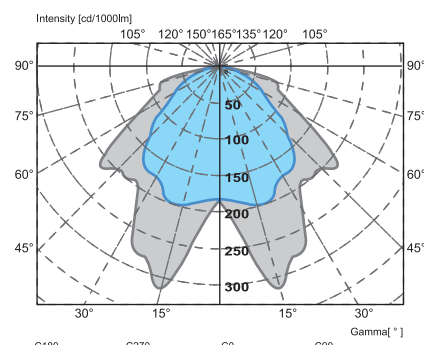

Photometry result or data are available for interior lux calculation upon requisition. Photometry constructed by own Goniophotometer accurately measure the intensity distribution LOR, photometric factors and lumen per watt of light fittings.


Technical Data

Body	Made of heavy gauge sheet steel.
Cover	Wirenet.
Reflector	Hammertone anodised aluminium.
Paintwork	Fully coated with a high gloss white epoxy polyester, giving resilient finish.
Light Source	Metal Halide/Sodium.
Electrical Data	240V, 50Hz
Wire	Silicone heat resistance cable.
Ballast	70W/150W/250W/400W
Lampholder	E27/E40
Control Gear Box	Build-in

Dimensions

MODEL NO.	NO. OF LAMP
VENUS 100.070MH	1 X 70W
VENUS 100.150MH	1 X150W
VENUS 100.250MH	1 X250W
VENUS 100.400MH	1 X400W

MODEL NO.	NO. OF LAMP
VENUS 100.400SON	1 X400W



Note : Subject to +/- 1.5mm

*SJ Lite reserves the right to change and amend the specification without prior notice.