



Your partner in lighting technology



AURORAS LED

SLR Linear Louvre Series

Features & Benefits

The LED Panel Light delivers premium LED performance with directional luminance control (360°) glare control. It is rare that an architecturally inspired range of luminaires for recessed.

Application

Ideal for hospitals, offices, retail stores, supermarkets, schools, hotels, factories, car parks and other indoor places to use.

Luminaire Product Description

| | |
|---------------------------|---------------------|
| Mounting | Recessed |
| Housing Material | Cold Roll Sheet |
| Power Supply | 240V 50Hz |
| Operating Temperature | 45°C |
| Power Factor | 0.95 |
| Total Harmonic Distortion | ≤20% |
| Ingress Protection | IP20 |
| Insulation Classification | Class I |
| Life Cycle | 30,000hrs/50,000hrs |


Optics

| | |
|-------------------|--------------------------------|
| Diffuser Material | Acrylic |
| Diffuser Pattern | LED Opal |
| Louvre Material | White Paint Anodised Aluminium |


Control

| | |
|-----------------|-------------------------|
| *Dimming Option | Fixed Output/Dali/1-10V |
|-----------------|-------------------------|

Photometric

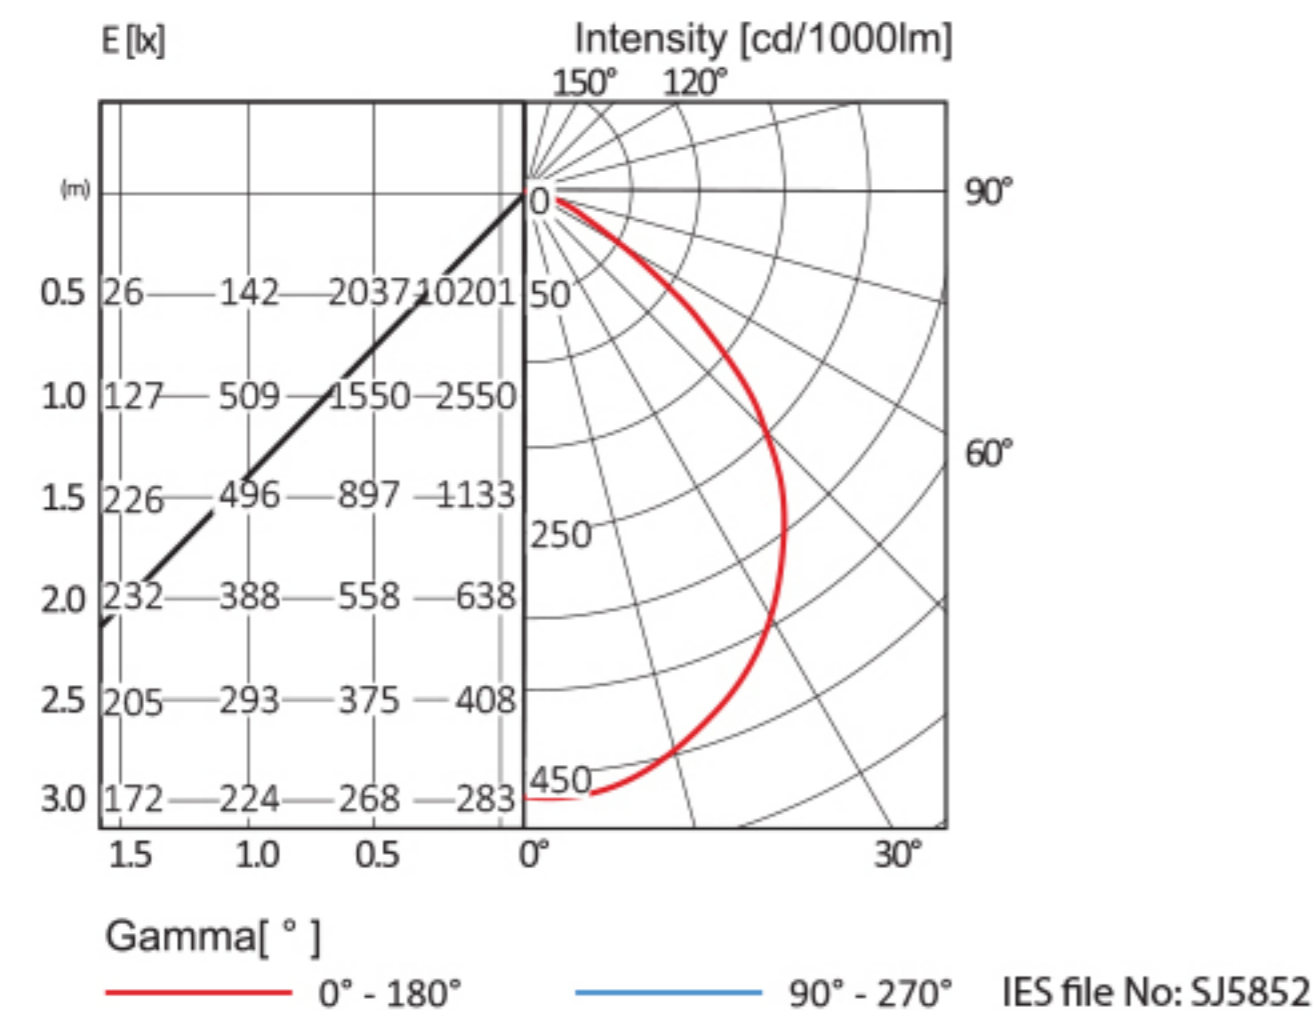


Dimension

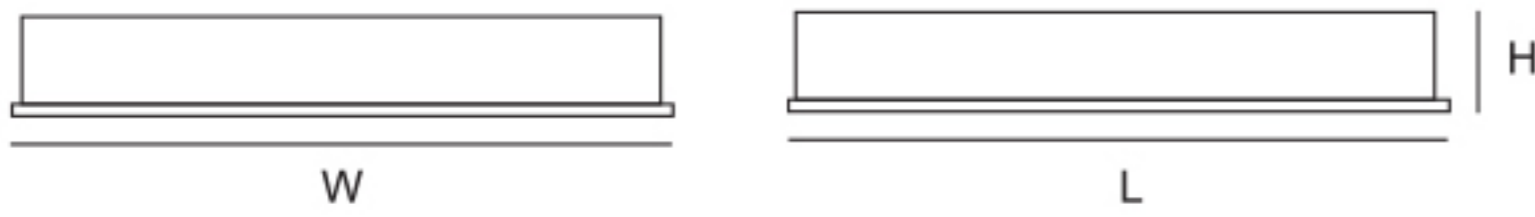

Order Reference

| Model | Number Of Module | Brand Of Component |
|-------|---|-----------------------------|
| SLR | A (1 module) B (2 modules) C (3 modules) D (4 modules) | 4 - Philips 5 - Tridonic |

Example :

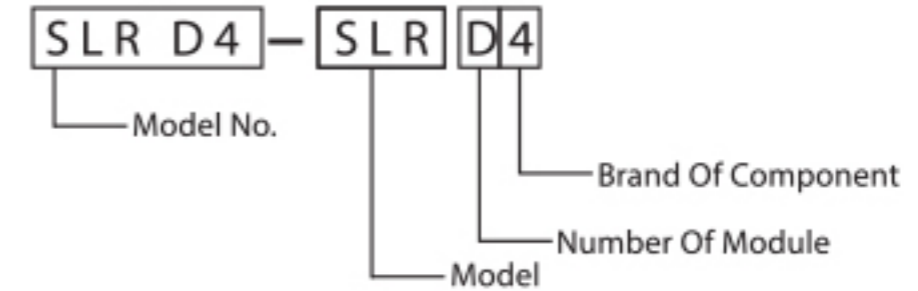

Order Information

| Model No. | Dimension (LxWxH) (mm) | Driver Model | Light Source Model | Module Dimension (WxL) (mm) | Nominal Lumen Per Modules (lm) @25°C | CRI & CCT | Nominal Power (W) | Nominal System Lumen Output (lm) | Nominal System Efficacy (lm/W) |
|--------------|------------------------|--------------|--------------------|-----------------------------|--------------------------------------|-------------|-------------------|----------------------------------|--------------------------------|
| SLR D4 (2x2) | 615x615x80 | CertaDrive | CertaFlux | 20x560 | 1550 | 830/840/865 | 46 | 3900 | 85 |
| SLR D4 (2x2) | | | | | 2200 | | 69 | 5500 | 80 |

Note : Subject to +/- 1.5mm

*Other various types are available upon request.