




## Description

Recessed mounted IP65 bottom opening luminaire.

## Application

Mainly used for hospital, labs, clean room, commercial kitchen & etc.

## Photometric

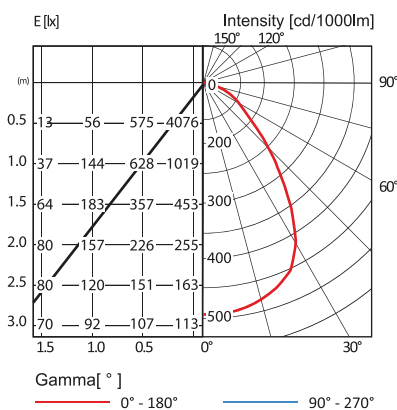

IES file No: SJ5284

## Options

- Clear Acrylic Diffuser
- Dimming
- 3000K/6500K
- High output available


## Electrical

<b>Control Gear</b>	Tridonic
<b>Light Source</b>	Linear LED Strip
<b>Wattage</b>	24W
<b>Lumen Output</b>	>2000lm
<b>CRI</b>	80
<b>LER</b>	83
<b>CCT</b>	4000K
<b>SDCM</b>	<4
<b>L70</b>	50,000hrs

## Mechanical

<b>Construction</b>	Made of cold rolled steel
<b>Diffuser</b>	AA12 Acrylic

## Dimension



PAC B5 CRF: W=335mm L=1295mm

## Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (Watt)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
<b>PAC B5 CRF</b>					
<b>Bottom Opener (1x4)</b>	<b>1324x362x118</b>	<b>Tridonic</b>	<b>24</b>	<b>&gt;2000</b>	<b>83</b>

\*Note: Subject to +/- 1.5mm

\*Specification subject to change without prior notice.