




Description

Surface mounted UGR 16 LED troffer.

Application

Offices, education facilities, retail.

Photometric

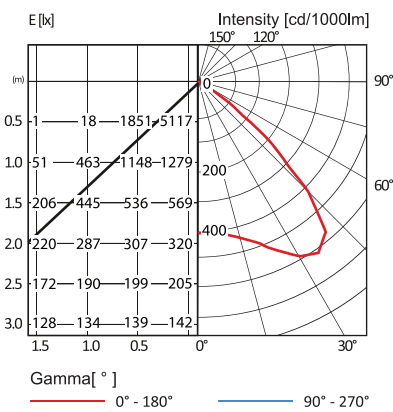


Electrical

Control Gear	Tridonic
Light Source	Linear LED Strip
Wattage	44W
Lumen Output	>3150lm
CRI	80
LER	72
CCT	4000K
SDCM	<4
L70	50,000hrs

Mechanical

Construction	Made of cold rolled steel
Louvre	High Quality Anodised Aluminium, Double Parabolic Louvre
Diffuser	Frosted U Shape

Dimension



Options

- Dimming
- 3000K / 6500K
- Cyanosis

Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (Watt)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PAC D5/S VDU	1195x295x85	Tridonic	44	>3150	72

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.