




Description

UGR 16 recessed T-bar LED louvre troffer.

Application

Offices and education facilities.

Photometric

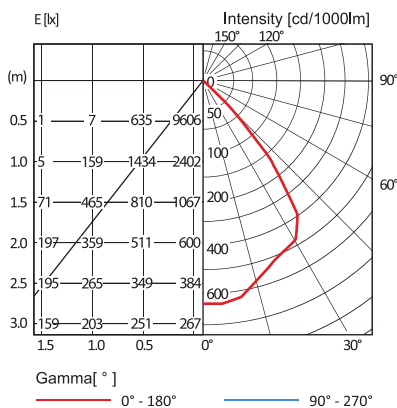

IES file No: SJ2519


Electrical

Control Gear	Philips
Light Source	Linear LED Strip
Wattage	56W
Lumen Output	>3900lm
CRI	80
LER	70
CCT	4000K
SDCM	<4
L70	50,000hrs

Mechanical

Construction	Made of cold rolled steel
Louvre	High Quality Anodised Aluminium
Diffuser	Frosted U Shape

Dimension



Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (Watt)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PAC D4 VDU PF (1x4)	1195x295x70	Philips	56	>3900	70

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.

Options

- Dimming
- 3000K / 6500K
- Cyanosis