




Description

IP65 heavy duty vandal resistant polycarbonate linear LED fixture. Complete with polycarbonate diffuser & stainless steel mounting clips.

Photometric

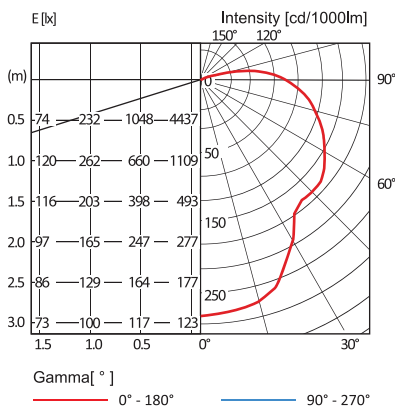

IES file No: SJ4768

Options

- T8 LED Tube
- Emergency
- Shower Lights
- Pole Mount
- Dimming

Application

Carparks, under eaves, service areas and other industrial applications.


Electrical

Control Gear	Tridonic
Light Source	Linear LED Strip
Wattage	39W
Lumen Output	>3800lm
CRI	80
LER	97
CCT	4000K
SDCM	<4
L70	50,000hrs

Mechanical

Construction	Polycarbonate
Diffuser	Polycarbonate
Secondary Diffuser	Frosted U Shape

Dimension



Ordering Data

MODEL NO.	Dimension (LxWxH) (mm)	Light Source Model	Nominal System Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PCR A5	660x85x87	Tridonic	12	>1000	83
PCR A5	660x85x87	Tridonic	20	>1900	95
PCR B5	660x134x87	Tridonic	24	>2100	88
PCR B5	660x134x87	Tridonic	39	>3800	97
PCR B5	1269x85x87	Tridonic	24	>2100	88
PCR B5	1269x85x87	Tridonic	39	>3800	97
PCR D5	1269x134x87	Tridonic	48	>4200	88
PCR D5	1269x134x87	Tridonic	78	>7700	99

*Note: Subject to +/- 1.5mm

For the latest product information please visit <http://www.sirijaya.com>

*Specification subject to change without prior notice.