




### Description

Surface mounted LED linear narrow diffused batten.

### Application

Suitable for commercial, industrial and domestic applications.

### Photometric

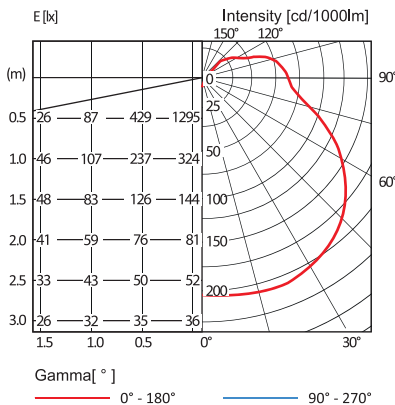

IES file No: SJ5153


### Electrical

<b>Control Gear</b>	Tridonic
<b>Light Source</b>	Linear LED Strip
<b>Wattage</b>	24W
<b>Lumen Output</b>	>1600lm
<b>CRI</b>	80
<b>LER</b>	67
<b>CCT</b>	4000K
<b>SDCM</b>	<4
<b>L70</b>	50,000hrs

### Mechanical

<b>Construction</b>	Made of cold rolled steel
<b>Diffuser</b>	Opal Acrylic

### Dimension



### Options

- Dimming
- 3000K / 6500K
- Acrylic Diffuser
- T8 LED Tube

### Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PDBN A5	624x69x105	Tridonic	12	>800	67
PDBN A5	624x69x105	Tridonic	20	>1500	75
PDBN B5	1235x69x105	Tridonic	24	>1600	67
PDBN B5	1235x69x105	Tridonic	39	>3000	77

\*Note: Subject to +/- 1.5mm

\*Specification subject to change without prior notice.