




Description

Surface mounted LED linear wide diffused batten.

Application

Suitable for commercial, industrial and domestic applications.

Photometric

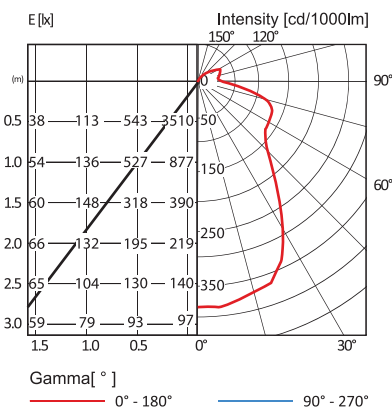

IES file No: SJ5158


Electrical

Control Gear	Tridonic
Light Source	Linear LED Strip
Wattage	24W
Lumen Output	>2350lm
CRI	80
LER	97
CCT	4000K
SDCM	<4
L70	50,000hrs

Mechanical

Construction	Made of cold rolled steel
Diffuser	AA12 Acrylic

Dimension



Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PDBW A5	624x120x108	Tridonic	12	>1150	96
PDBW A5	624x120x108	Tridonic	20	>2150	108
PDBW B5	624x120x108	Tridonic	24	>2350	97
PDBW B5	624x120x108	Tridonic	39	>4350	111
PDBW B5	1234x120x108	Tridonic	24	>2350	97
PDBW B5	1234x120x108	Tridonic	39	>4350	111
PDBW D5	1234x120x108	Tridonic	48	>4650	97
PDBW D5	1234x120x108	Tridonic	78	>8750	112

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.

For the latest product information please visit <http://www.sirijaya.com>