




Description

Recessed LED linear wall wash.

Application

Ideal for offices, schools, commercial, retail and hospital.

Photometric

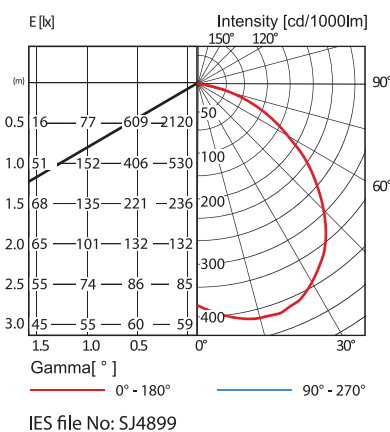


Electrical

Control Gear	Tridonic
Light Source	Linear LED Strip
Wattage	24W
Lumen Output	>1400lm
CRI	80
LER	58
CCT	4000K
SDCM	<4
L70	50,000hrs

Mechanical

Construction	Extruded Aluminium
Diffuser	Opal

Dimension



PEA B5: W=99mm L=1133mm

Options

- Natural Anodized
- Epoxy Powder Coat
- Dimming
- Cyanosis
- Custom Fitting
- Emergency
- 3000K / 6500K

Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (W)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PEA B5	1154x115x100	Tridonic	24	>1400	58
PEA B5	1154x115x100	Tridonic	39	>2600	67

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.