




Description

Rectangular aluminium continuous LED extrusion. Suitable for suspended or surface mounting. Direct or indirect distribution via ULB or linear prismatic diffuser.

Application

Ideal for offices, schools, commercial, hospital applications.

Photometric

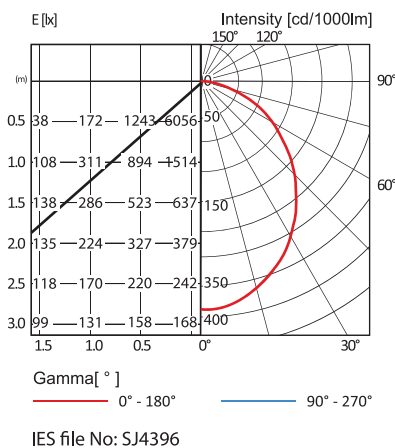

Electrical


Control Gear Tridonic
Light Source Linear LED Strip

Wattage 39W
Lumen Output >3850lm
CRI 80
LER 99
CCT 4000K
SDCM <4
L70 50,000hrs

Mechanical

Construction Extruded aluminium
Diffuser LED Frosted

Dimension



Options

- Natural Anodized
- Epoxy Powder Coat
- Dimming
- Surface
- Suspended
- Cyanosis
- Custom Fittings
- Emergency
- T5
- 3000K / 6500K

Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (Watt)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PEF A5 Surface	568x80x100	Tridonic	12	>1000	83
PEF A5 Surface	568x80x100	Tridonic	24	>1900	79
PEF B5 Surface	1128x80x100	Tridonic	24	>2000	83
PEF B5 Surface	1128x80x100	Tridonic	39	>3850	99

*Note: Subject to +/- 1.5mm

*Specification subject to change without prior notice.