




## Description

Recessed airhandling LED troffer.

## Application

Ideal for offices, retail stores, supermarkets, school and hotels.

## Photometric

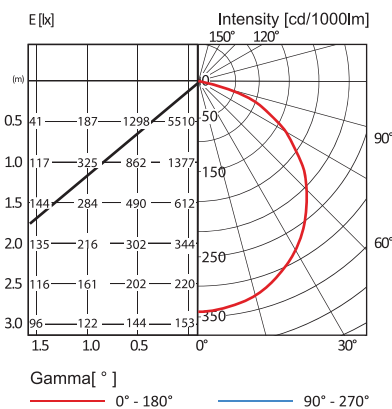

IES file No: SJ5162

## Options

- Dimming
- 3000K / 6500K
- Cyanosis
- Emergency

## Electrical

<b>Control Gear</b>	Tridonic
<b>Light Source</b>	Linear LED Strip
<b>Wattage</b>	39W
<b>Lumen Output</b>	>3950lm
<b>CRI</b>	80
<b>LER</b>	101
<b>CCT</b>	4000K
<b>SDCM</b>	<4
<b>L70</b>	50,000hrs

## Mechanical

<b>Construction</b>	Made of cold rolled steel
<b>Diffuser</b>	Frosted Opal

## Dimension



## Ordering Data

MODEL NO.	Dimension (LxWxH)(mm)	Light Source Model	Nominal System Power (Watt)	Nominal System Lumen Output (lm)	Nominal System Efficacy (lm/W)
PLA A5 (1x2)	595x295x85	Tridonic	12	>1000	83
PLA A5 (1x2)	595x295x85	Tridonic	20	>1950	96
PLA B5 (1x4)	1195x295x85	Tridonic	24	>2050	85
PLA B5 (1x4)	1195x295x85	Tridonic	39	>3950	101
PLA B5 (2x2)	595x595x85	Tridonic	24	>2050	85
PLA B5 (2x2)	595x595x85	Tridonic	39	>3950	101

\*Note: Subject to +/- 1.5mm

\*Specification subject to change without prior notice.